




General

Our products are designed to comply with the recommended codes and practice, and is to be installed and serviced by competent persons in accordance with the relevant regulations.

Installation

Product requires the ESP Security Hub (ECSPHB). The accessory that requires the booster needs to be registered to the hub, then to the booster to achieve improved signal with-in the 80meter range.

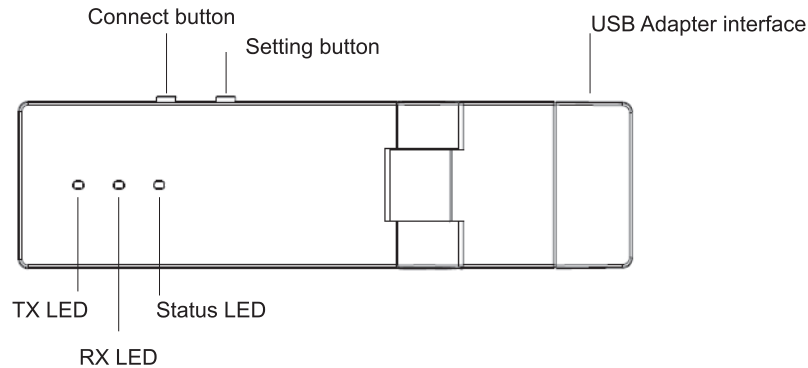

- The repeater should be in the centre between the hub and accessories
- Avoid mounting the repeater in areas with large amounts of metal, or electrical wiring.

1. Power the unit On
 - Once powered the device will automatically turn on.
 - If the device hasn't turned on, long press the setting button to turn the unit On/Off
2. Register RF433 Accessories
 - Press the connection button to enter connection mode, the green and blue LED will be illuminated.
 - Trigger the desired accessory once within the next 30 seconds. You will see the green LED flash 3 times; this indicates the registration has been successful. If the blue LED flashes 3 times, this indicates the accessory has already been registered.
3. Clear all registered devices
 - Press and hold the connection button until the green and blue LEDs flash (for 5 seconds). All accessories registered have been deleted from the repeater.

LED Indicators;

1. TX LED
 - OFF: No RF signal is transmitting
 - Blue continuous: In connection mode
 - Blue flashing: Transmitting an RF signal
2. RX LED
 - OFF: No RF signal is being received
 - Green continuous: In connection mode
 - Green flashing: Receiving an RF signal
3. Status LED
 - OFF: Power off
 - Red continuous: Operating mode, only transmitting registered accessory(ies) signals
 - Red flashing: Test mode, will transmit all received signals.

Guidance

- >Smart alarm accessories are specified at a maximum of 80 meters Line of Sight (LoS) in open air.
For every obstacle the signal strength is reduced.
- > Battery life depends on working and environmental factors.

For more product information please visit the ESP website
For pairing instructions, please refer to the main Hub Manual.



Elite Security Products
Redditch B98 8YN



Telephone : 01527 51 51 50

Fax: 01527 51 51 43

Email : info@espuk.com

Web : www.espuk.com

E&OE - Errors and omissions excepted.G21