

## 2 Port PCI Express (PCIe) SuperSpeed USB 3.0 Card Adapter with UASP - SATA Power

StarTech ID: PEXUSB3S24



The PEXUSB3S24 2-Port PCI Express USB 3.0 Card lets you add two USB 3.0 ports to your PCI Express-enabled computer system, with an optional SATA power connector to connect to your system power supply and deliver up to 900mA of power per port to USB 3.0 bus-powered devices (500mA for USB 2.0).

Enhanced with UASP support (USB Attached SCSI Protocol), this USB 3.0 controller performs up to 70% faster than conventional USB 3.0 when paired with a <a href="UASP supported enclosure">UASP</a> is not supported by all operating systems). Using a more efficient protocol than the traditional USB BOT (Bulk-Only Transport), UASP technology optimizes transfers by allowing multiple commands to be processed simultaneously, significantly increasing transfer speeds for less wait time on data transfers. See our UASP test results below for further details.


The PCIe USB 3.0 adapter is compliant with USB 3.0 standards for data transfer speeds up to 5 Gbps, while still offering backward compatibility with existing USB 2.0 / 1.1 devices. For added versatility, the controller card is equipped with a standard profile bracket and includes a low-profile/half-height bracket for installation in small form-factor computers.

Backed by a StarTech.com 2-year warranty and free lifetime technical support.


# Improved Performance with UASP

UASP is supported in Windows® 8, 8.1, Server 2012 and Linux kernel 2.6.37 or later. In testing UASP performed with up to a 70% faster read / 40% faster write speed over traditional USB 3.0 at peak performance.



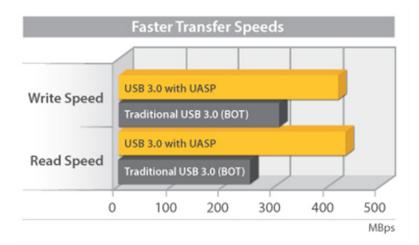

At the same peak in testing, UASP also showed up to an 80% reduction in required processor resources.

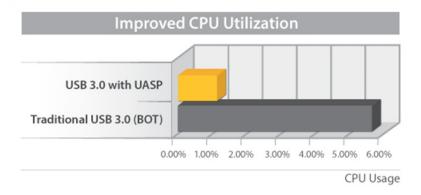

Test results were obtained using an Intel® lvy Bridge system, StarTech.com add-on USB 3.0 cards, a UASP-enabled StarTech.com enclosure, and a SATA III solid state drive.

#### **Applications**

- Upgrade an older PCle-based system from USB 2.0 to USB 3.0 connectivity
- Expand the USB capabilities of your system with two additional external ports
- Connect additional external hard drives, CD/DVD drives, MP3 players, printers, scanners, webcams, game controllers, digital cameras, etc. to a computer system



#### **Features**

- Provides two external USB 3.0 ports with UASP support
- Supports data rates up to 5 Gbps
- Compliant with PCI Express 2.0 specifications
- Optional SATA power connector provides up to 900mA per USB port
- Supports USB Battery Charging Specification 1.2
- Fully compliant with USB 3.0 rev 1.0 and Intel xHCI rev 1.0 specifications
- Backward compatible with USB 2.0 and USB 1.0/1.1 devices
- Includes a Low Profile/half-height installation bracket



### **Technical Specifications**

Warranty 2 Years

Bus Type PCI Express

Card Type Standard Profile (LP bracket incl.)

Chipset ID NEC - µPD720202

Industry USB 3.0 Specification Rev. 1.0

Standards PCI Express Base Specification Rev. 2.0

Intel xHCI Specification Rev. 1.0

Interface USB 3.0

Port Style Integrated on Card

Ports 2

Connector 1 - PCI Express x1 Male

Type(s)

External Ports 2 - USB 3.0 A (9 pin; SuperSpeed) Female

Internal Ports 1 - SATA Power (15 pin) Plug

Maximum 3 m [9.8 ft]

Cable Length

Maximum 5 Gbps

Data Transfer

Rate

Type and USB 3.0 - 5 Gbit/s

Rate

UASP Yes

Support

OS Windows® 8 (32/64bit), 7 (32/64), Vista(32/64), XP(32/64)

Compatibility Windows® Server 2012, 2008 R2, 2003(32/64)

Linux 2.6.31 or later

**Note** The maximum throughput of this card is limited by the bus interface. If used with PCI Express Gen

1.0 enabled computers, the max throughput is 2.5 Gbps. If used with PCI Express Gen 2.0 enabled

computers, the max throughput is 5 Gbps.

System and Available PCI Express slot

Cable

Requirements

Product 60 mm [2.4 in]

Height

Product 65 mm [2.6 in]

Length

Product 40 g [1.4 oz]





Weight

Product

18 mm [0.7 in]

Width

Humidity

20-80% RH

Operating

5°C to 50°C (41°F to 122°F)

Temperature

Storage

-25°C to 70°C (-13°F to 158°F)

Temperature

Shipping

130 g [4.6 oz]

(Package)

Weight

Included in 1 - PCI Express USB 3.0 Card

Package

Included in

1 - Low Profile Bracket

Package

Included in 1 - Driver CD

Package

Included in

1 - Instruction Manual

Package





## Certifications, Reports and Compatibility













