




**Tripp Lite**  
1111 West 35th Street  
Chicago, IL 60609 USA  
Telephone: +(773) 869 1234  
E-mail: [saleshelp@tripplite.com](mailto:saleshelp@tripplite.com)

## Model #: PDU3XMV6G20

**3 Phase Metered PDU, 11.5 kW, 45 240/230/220V outlets (36 C13, 9 C19), IEC-309 Red 16A 415/400/380V input, 0U vertical mount**

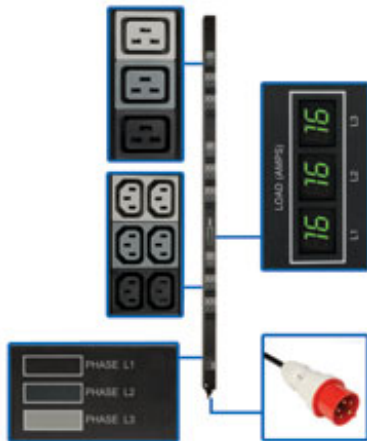

### Highlights

- Metered 11.5/11/10.5kW 3 Phase 415/400/380V input 240/230/380V output PDU
- Set of 3 digital meters reports output load level per phase in amps
- 70in / 1778mm 0U vertical format, toolless button-mount installation
- IEC-309 Red 16A (3P+N+E) 3 phase input; 6ft 1.8m line cord
- 36 C13 & 9 C19 single phase outlets; Included cord retention brackets

### Description

Tripp Lite 3 phase Metered PDU / Power Distribution Units offer real-time local reporting of current levels in amps via set of 3 built-in digital meters. Enables visual monitoring of PDU current levels to preserve proper loading balance and prevent circuit overloads as additional equipment is added. Offers reliable rackmount multi-outlet power distribution from any protected UPS, generator or mains input power source. High quality design includes rugged all-metal housing and secure rackmount installation with included mounting accessories.

#### Applications

Ideal for 3 phase network configurations in datacenters and heavily configured equipment racks

#### Package Includes

- Metered rackmount PDU with pre-installed mounting buttons
- Cord retention brackets
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual

### Features

- 11.5 / 11 / 10.5kW Metered Power Distribution Unit (PDU)
- 415 / 400 / 380V input with IEC-309 Red 16A (3P+N+E) 3-phase input connection
- 240 / 230 / 220V output with 36 C13 & 9 C19 single phase output receptacles
- Supports 50/60Hz worldwide applications with CE and North American certifications
- 0U / 1778mm vertical rackmount installation supported
- Outlets are arranged in 3 metered 15 outlet load banks
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included) for other mounting applications

### Specifications

OVERVIEW	
PDU Type	Metered

<b>OUTPUT</b>	
Output Capacity Details	11.5kVA (with 415V input) / 11kVA (with 400V input) / 10.5kVA (with 380V input) total; 16A per bank (balanced)
Frequency compatibility	50 / 60 Hz
Output nominal voltage	Single phase 240V (with 415V input), 230V (with 400V input), 220V (with 380V input)
Outlet quantity / type	45 total - 36 C13 (12 per phase), 9 C19 (3 per phase)
Outlet Type	IEC-C13, IEC-C19
<b>INPUT</b>	
Nominal Input Voltage(s) Supported	380V AC; 400V AC; 415V AC
PDU Input Voltage	400; 380; 415
Maximum Input Amps (A)	16
PDU Plug Type	IEC-309 16A RED (3P+N+E)
Input cord length (ft.)	6
Input cord length (m)	1.8
Phase	3-Phase
<b>PHYSICAL</b>	
Shipping Dimensions (HWD/in)	6.1 x 4.3 x 75.8
Shipping Dimensions (HWD/cm)	15.5 x 10.9 x 192.5
Shipping weight (lbs)	13.8
Shipping weight (kg)	6.2
Unit Dimensions (HWD/in)	70 x 2.2 x 1.93
Unit Dimensions (HWD/cm)	177.8 x 5.6 x 4.9
Unit weight (lbs)	9
Unit weight (kg)	4.1
Material of construction	Steel
Style	Vertical rackmount
Form factors supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Relative Humidity	0-95% non-condensing
<b>CERTIFICATIONS</b>	
Certifications	Tested to UL (USA), CSA (Canada), NOM (Mexico), CE (EU), Class A (Emissions), RoHS (Hazardous Substances)
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

---

## Related Items

### Optional Products

Related Model	Description	Qty.
<a href="#">P004-002-13LA</a>	AC Power Extension Cable - C13 Left Angle to C14 - 2'	1
<a href="#">P004-002-13RA</a>	AC Power Extension Cable - C13 Right Angle to C14 - 2 ft.	1
<a href="#">P047-006</a>	6-ft. 14AWG Heavy Duty Power cord (IEC-320-C19 to IEC-320-C14)	1
<a href="#">P047-010</a>	10-ft. 14AWG Heavy Duty Power cord (IEC-320-C19 to IEC-320-C14)	1
<a href="#">P036-002-19LA</a>	2-ft. 12AWG Heavy Duty Power cord (IEC-320-C19 Left Angle to IEC-320-C20)	1

More information, including related products, owner's manuals, and additional technical specifications, can be found online at [www.tripplite.com/en/products/model.cfm?variables.txtModelID=5104](http://www.tripplite.com/en/products/model.cfm?variables.txtModelID=5104).

---

Copyright © 2013 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.