

UNION Door Closers

N8834

Medium Duty CE Marked



ASSA ABLOY

Application:

- Suitable for fire resistant doors and other internal doors
- Sizes EN 3 - 4, template selectable




Specification:

- Independent, fully adjustable hydraulic door speed and latch controls
- Non-handed
- Concealed adjustment controls
- Adjustable flatform arm
- Easy-to-use template and pictorial fitting instructions
- Signature style nylon cover
- Available in SIL and GLD finishes

Finish:

- SIL - Silver
- GLD - Gold

	Apps 1 & 61	App 66
Max door width	1100mm	950mm
Max door mass	80kg	60kg
Max opening angle	180°	130°



Standards:

- Certificate Number: 1162-CPD-0132 (CE mark not valid if door width/mass exceeds values shown)
- 3rd party tested to BS EN 1154
4 8 3/4 1* 1 3
- * Included in fire tests to BS EN 1634-1 with assessment for use on timber fire doors with intumescent protection up to FD120
- Certifire Certificate Number: CF391



UNION Door Closers

N8834


Medium Duty CE Marked



ASSA ABLOY

Technical Design:

Variants:

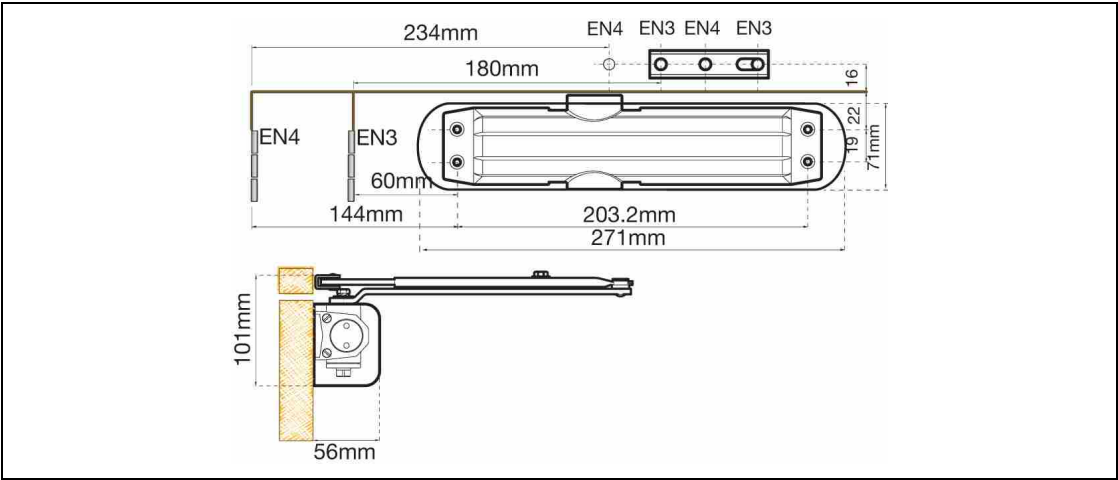

J-N8834GLD	Size 3, 4 selectable CE marked door closer
J-N8834SIL	Size 3, 4 selectable CE marked door closer