

UNION Door Closers

N8824BC

Medium Duty



ASSA ABLOY

Application:

- Suitable for fire resistant doors and other internal doors
- Sizes EN 2-4 wind through adjustable




Specification:

- Aluminium body, steel armset
- Independent door speed and latch controls
- Adjustable backcheck
- Non-handed for maximum flexibility
- Concealed fixings and adjustment controls
- Curve or Linear cover styles in a choice of finishes
- Adjustable, platform arm
- Easy-to-use template and pictorial fitting instructions
- Also available as hold-open
- Universal - can be fitted as App. 1, App. 66 or App. 61
- Available in SIL, SSF, PSF, GLD and PBF finishes. All covers have matching arms

Finish:

- SIL - Silver finish
- SSF - Satin Stainless Steel finish
- PSF - Polished Stainless Steel finish
- PBF - Polished Brass finish
- GLD - Gold finish

	Apps 1 & 61	App 66
Max door width	1100mm	1100mm
Max door mass	80kg	60kg
Max opening angle	135°	160°

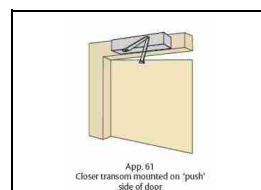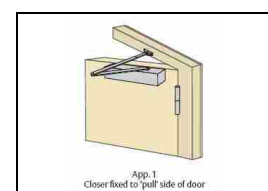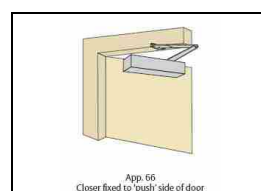

Standards:

- Certificate Number: 1121-CPD-AD0052 (CE mark not valid if door width/mass exceeds values shown)
- 3rd party tested to BS EN 1154

3	8	4/2	1*	1	3
---	---	-----	----	---	---

* Included in fire tests to BS EN 1634-1 with assessment for use on timber fire doors with intumescent protection up to FD120
- Certifire Certificate Number: CF410



certifire

BS3621:2007


UNION Door Closers

N8824BC

Medium Duty



Technical
Design:

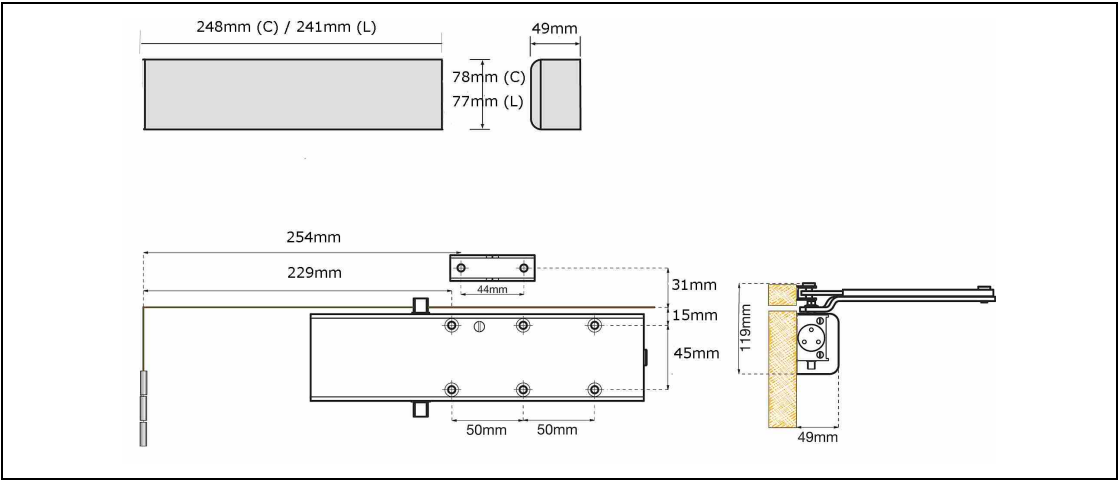

Variants:

J-N8824BC-C-GLD	Size 2 - 4 wind-through CE marked door closer with backcheck and curved cover
J-N8824BC-C-SIL	Size 2 - 4 wind-through CE marked door closer with backcheck and curved cover
J-N8824BC-C-SSF	Size 2 - 4 wind-through CE marked door closer with backcheck and curved cover
J-N8824BC-L-GLD	Size 2 - 4 wind-through CE marked door closer with backcheck and linear cover
J-N8824BC-L-SIL	Size 2 - 4 wind-through CE marked door closer with backcheck and linear cover
J-N8824BC-L-SSF	Size 2 - 4 wind-through CE marked door closer with backcheck and linear cover