

Eximo Range - BS EN1125

OAD805N

Outside Access Device



ASSA ABLOY

Application:

- Suitable for the external face of outward opening doors
- Suitable for doors between 38-70mm thick
- Concealed fixings
- To suit timber and metal doors

Specification:

- Available as 'return-to-door' lever or knob variant
- **No drilling or tapping of cylinder required**
- **Cylinder is shrouded for protection**
- **Non-handed** for maximum flexibility
- Sprung knob or lever withdraws latches/bolts when key has authorised access
- Key engages lever or knob, not exit device
- Lever or knob remains operational until key disengages it from exit device
- Supplied with UNION 5-pin euro profile cylinder as standard
- Can also be supplied without cylinder
- Can be supplied with 6-pin or MK cylinder to suit

Finish:

- SIL - Silver (RAL 9006)




Standards:

- Compatible with UNION PB801N, PD802N, PL803N, EPL804N and EP808N devices
- Included in successful performance test to BS EN 1125
- Included in successful FD30 timber fire door and FD240 metal fire door testing




Technical Design:

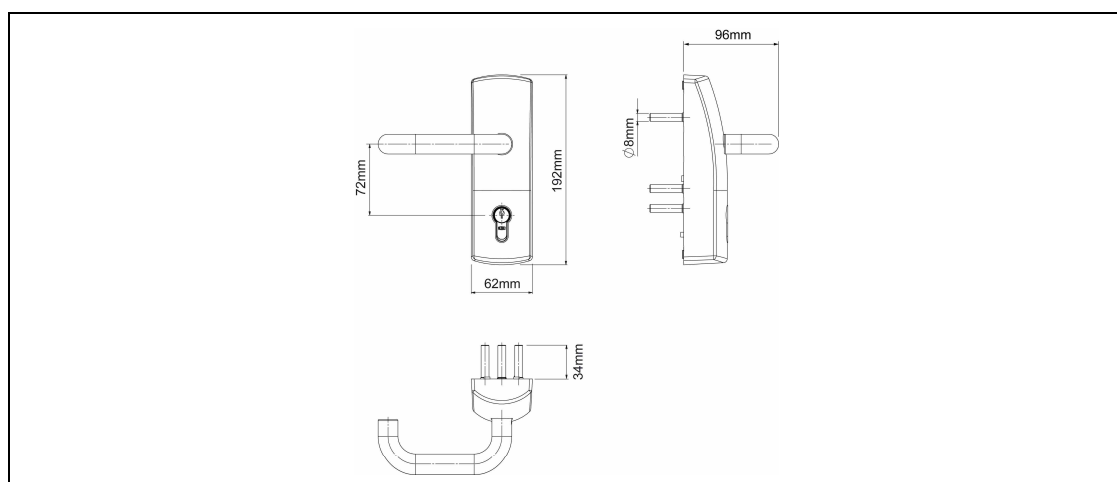

Eximo Range - BS EN1125

OAD805N

Outside Access Device

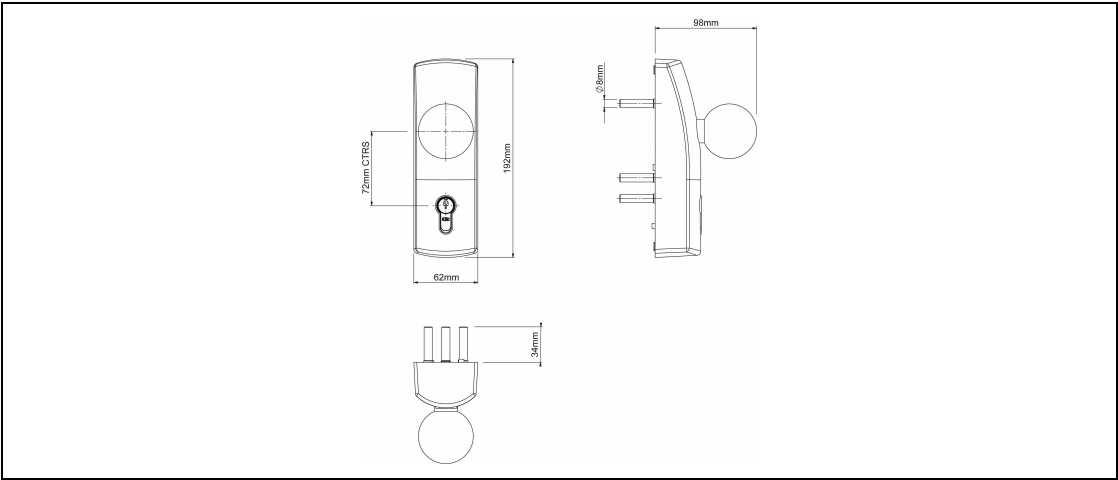

Variants:

| | |
|-----------------|---|
| J-OADLC805N-SIL | Outside Access Device, With RTD Lever & Cylinder, Silver Finish |
| J-OADKC805N-SIL | Outside Access Device, With Knob & Cylinder, Silver Finish |
| J-OADL805N-SIL | Outside Access Device, With RTD Lever, Silver Finish, W/O Cyl |
| J-OADK805N-SIL | Outside Access Device, With Knob, Silver Finish, W/O Cyl |