

# OBV Safety Catch Restrictor

For Aluminium Windows



# OBV Safety Catch Restrictor

## For Aluminium Windows




### Aluminium Adaptor

In the past it has not been possible to fit the extremely popular and widely specified OBV safety catch/restrictor to aluminium windows. To solve this problem, and to satisfy demand from the market, Winkhaus have purpose designed and developed an adaptor to enable the fitting of the product.

Manufactured with adaptability to suit the variable designs of aluminium Casement and Tilt-Turn windows the adaptor creates a solid and secure grounding for the OBV Safety Catch. A choice of fixing holes provides the most suitable screw positions depending on profile design.

A purpose made jig is available to ensure accurate and consistent drilling of fixing holes.<sup>1</sup>

Available in white powder coat finish (RAL 9016) or mill finish for self-coating.

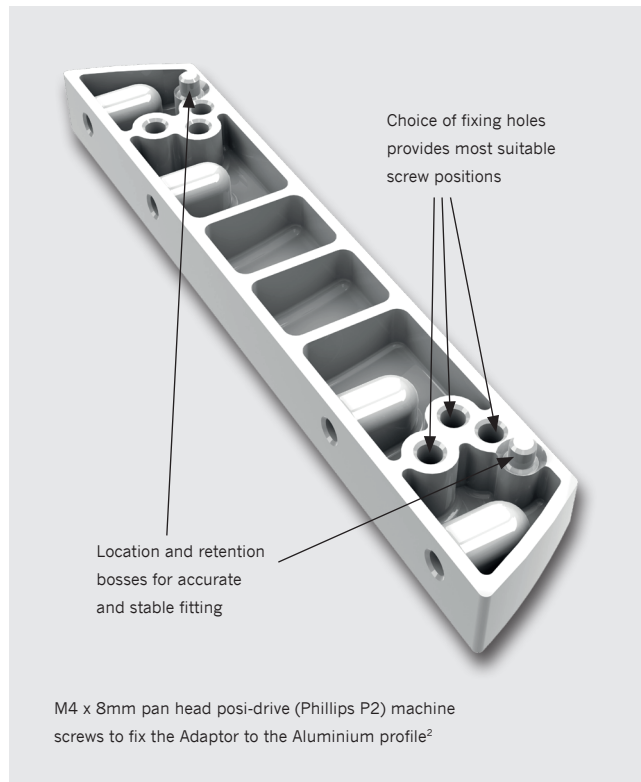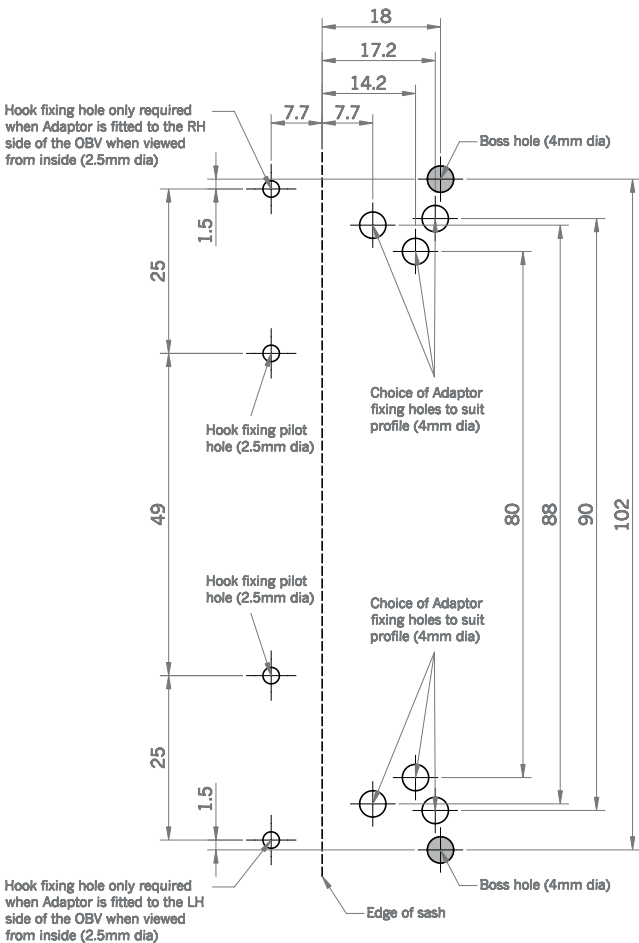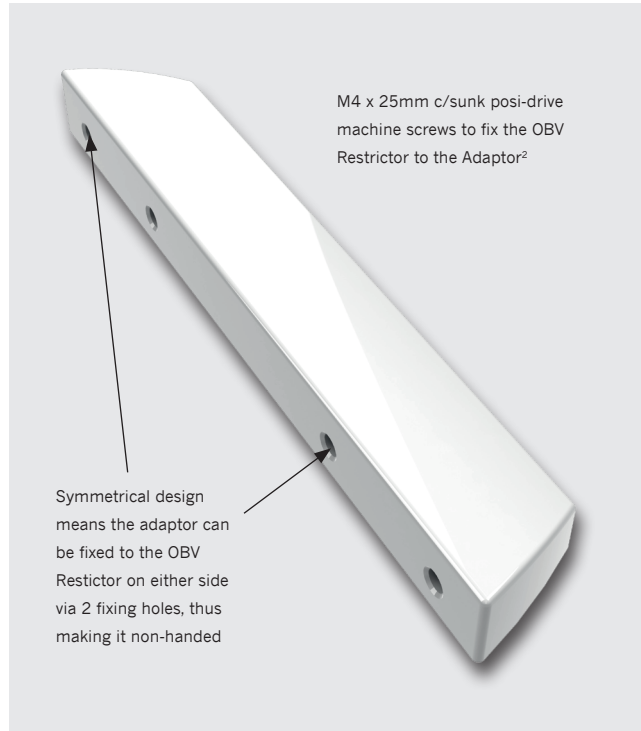

<sup>1</sup> A paper jig is available for cut-out on the back of this brochure

<sup>2</sup> Not supplied by Winkhaus

<sup>3</sup> Forcing the window closed (typically greater than 400N) without depressing the push button can damage the OBV

## OBV Safety Catch Restrictor


The Winkhaus OBV Safety Catch and OBVA (grub screw locking) are a family of window restrictors, which are designed to help prevent small children opening windows fully and accidentally falling out.

### Key features:


The robust design incorporates the following features:

- Conforms to BS6375 Part 2. Load bearing capability of Safety Devices.
- The OBV automatically prevents the opening of a window greater than 50mm - 100mm (depending on the positioning on the window).
- Locks in the open position. Push button to close.<sup>3</sup>
- Push button release - To fully open the sash depress and hold the push button.
- Automatically re-engaged when the window is closed.
- Surface mounted vertically or horizontally on both outward opening and inward opening windows, it can be retrofitted to existing windows as an additional security and safety device.
- $\pm 2\text{mm}$  adjustment of steel hook possible for correct operation.
- Drill jigs available for both site fixing and factory fixing.
- Purpose designed to provide high levels of child safety and increased security for both new and existing windows, together with a lockable 50mm vent position on the OBVA version.
- The hook component can be fitted by eye utilising aligning mark on body of the Safety Catch. The line can be transferred using a pencil to indicate the position for the hook base plate.
- Suitable for Casement and Tilt-Turn Aluminium windows.
- Available in white and mill finish.

### Casement Window





### Tilt and Turn Window



3mm and 5mm thick packers available to cater for variable sash upstand heights

M4 c/sunk posi-drive self-drilling screws to fix the Hook to the Aluminium profile<sup>2</sup>

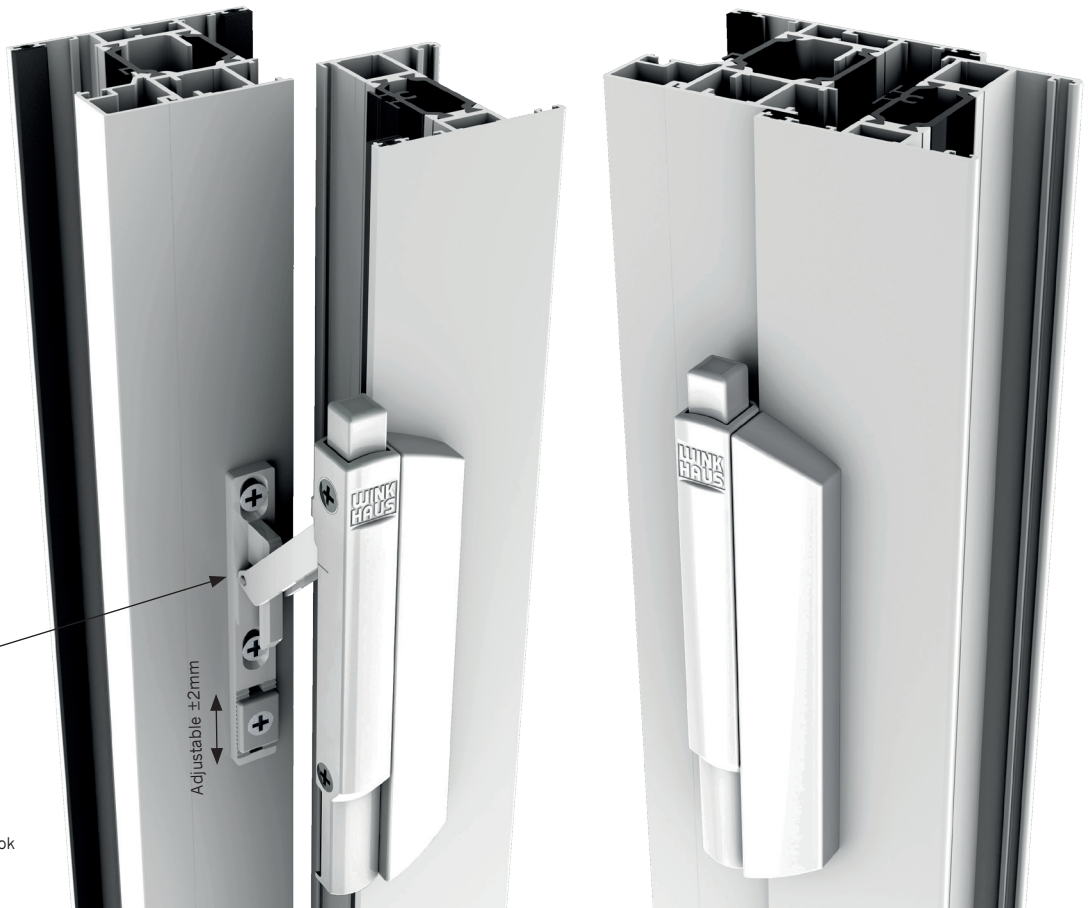

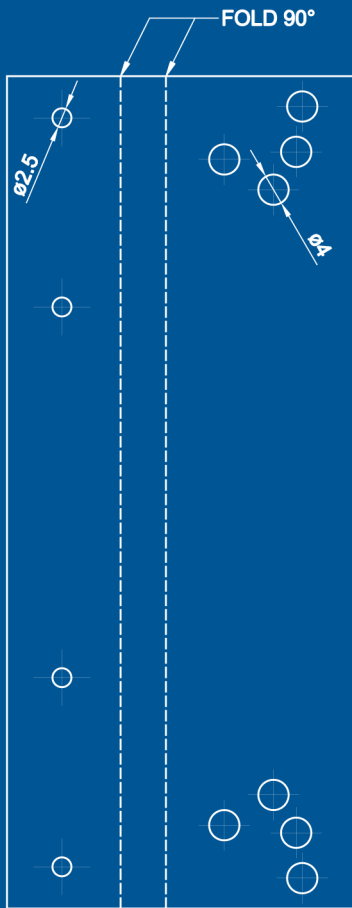

Winkhaus UK Ltd

2950 Kettering Parkway, Kettering,  
Northants NN15 6XZ

Tel: +44 (0)1536 316000

Fax: +44 (0)1536 416516

[www.winkhaus.co.uk](http://www.winkhaus.co.uk)

email: [enquiries@winkhaus.co.uk](mailto:enquiries@winkhaus.co.uk)