

Eximo Range - BS EN1125

PD802N

Double Rebated Door Panic Set



ASSA ABLOY

Application:





- For doors in buildings accessed by the public where panic can be foreseen
- Suitable for push face of outward opening doors
- For use on double doors with rebated meeting stiles
- Fixings to suit timber or metal doors

Specification:

- **Ease of adjustment** in main units by means of top and bottom adjustable locator units
- **Bottom rod unit already assembled** - no cutting required
- Rods already fitted with **round shoot bolts**
- **Spring loaded floor socket**
- **Non-handed** for maximum flexibility
- Anti-vandalism - **push bar retained in handles**
- Automatic top trip
- Downward pressure at any point on bar withdraws the bolts/latch ensuring immediate release of door
- Top rod and push bar can be cut to size to suit door dimensions
- Bolt projection: 14mm
- Anti-thrust
- Adjustable top & bottom shoots
- Complete with signage and pictorial fixing instructions
- Compatible with UNION OAD805N Outside Access Device
- Max. Door Leaf Width: 1300mm
- Max. Door Height: 2440mm
- Max. Door Leaf Mass: 200kg

Finish:

- SIL - Silver (RAL 9006)

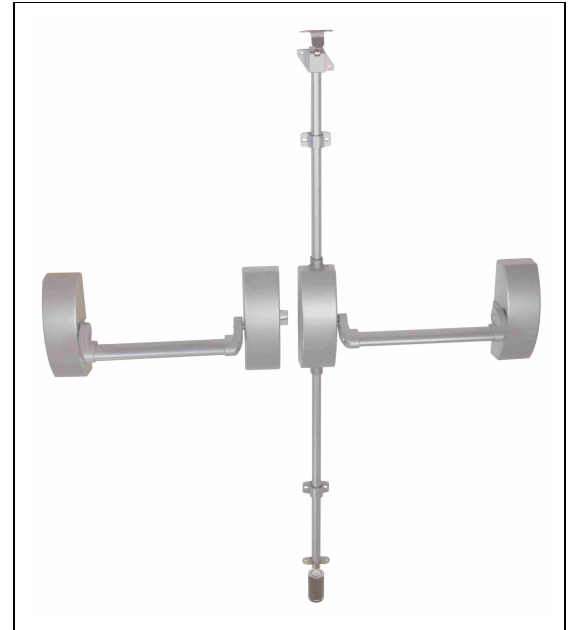

Standards:

- CE marked to BS EN 1125 (CE mark not valid if door exceeds measurements given)
- Included in fire tests to BS EN 1634-1

3	7	6	B	1	3	2	2	A	A
---	---	---	---	---	---	---	---	---	---
- Signage as required by BS EN 1125 annex A19, coloured green & white as detailed in BS 5499



Eximo Range - BS EN1125



PD802N

Double Rebated Door Panic Set



ASSA ABLOY

Technical Design:

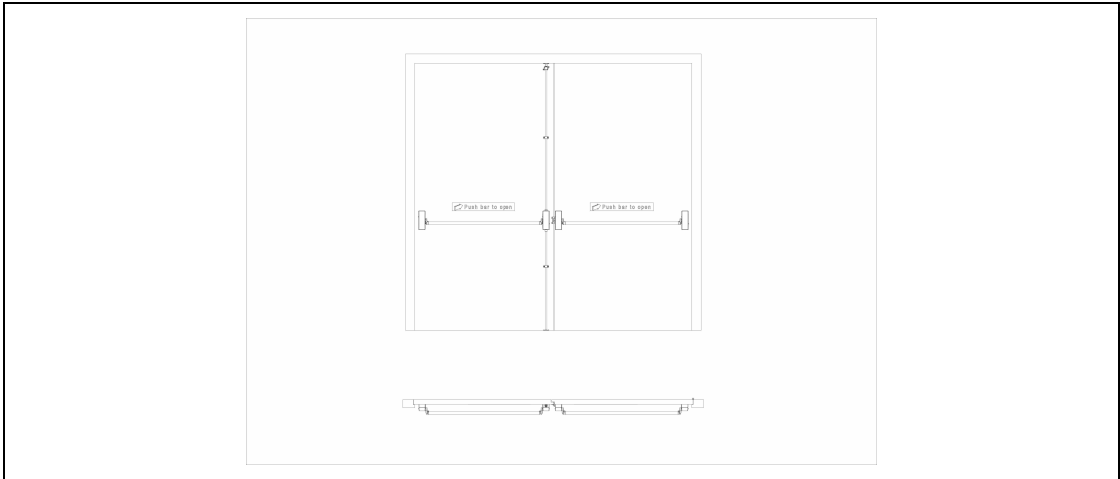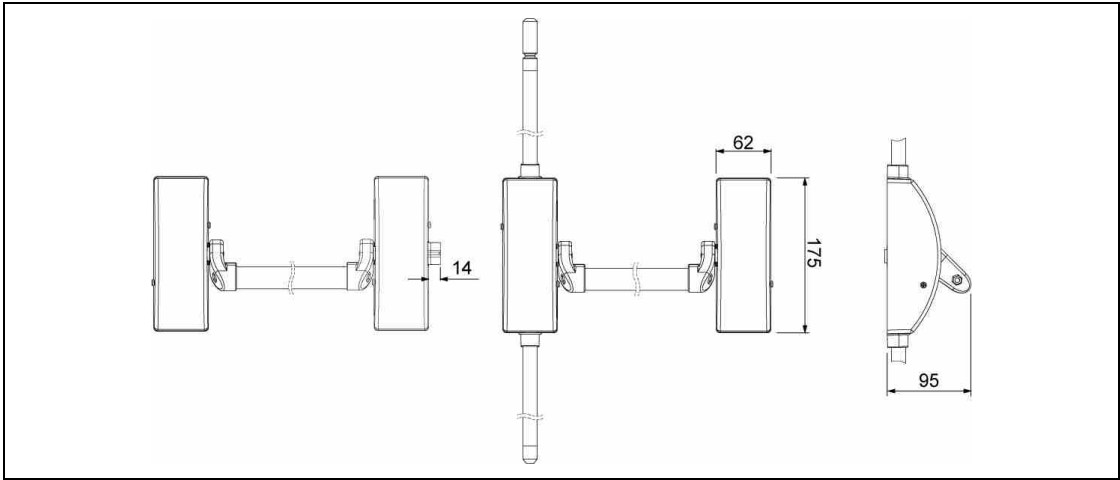

Variants:

J-PD802N-SIL-W	Double Rebated Door Panic Set, Timber Fixings, Silver Finish
J-PD802N-SIL-M	Double Rebated Door Panic Set, Metal Fixings, Silver Finish