


# ERA

## Emergency Barricade Device

INTERNAL DOORS

### ERA Lockdown - Single Door

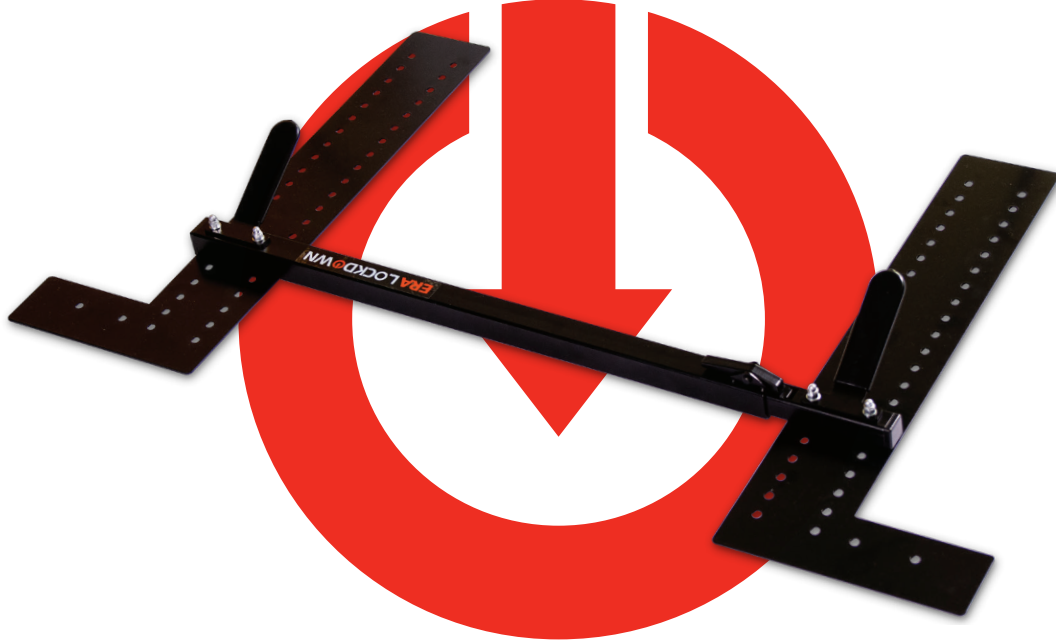

### Features

- Fast and easy to deploy emergency barricade device
- Suitable for inward and outward swinging single doors from 650mm to 1100mm width
- Securely locks to protect a room and occupants from outside forced entry
- Free standing secondary lightweight device (only 4kg) easily transferrable to another access point if required
- Tested to PAS24 Impact Resistance Standards
- Includes wall fixings for fast access and deployment



1  
YEAR

Mechanical  
Guarantee

t

Timber

a

Aluminium

## ERA Lockdown - Single Door

### Ordering Details

#### ERA Lockdown - Single Door

Product	Part No.
ERA Lockdown Single Door - Black	ERA-LOCKDOWN-SGL/A

### Technical Information

#### DEVICE NEEDS TO BE CONFIGURED BEFORE DEPLOYMENT

##### Hard Body Impact Test

Hard body impact is made to vulnerable areas of the door assembly to test its ability to withstand the impact.  
Passed 50kg

##### Mechanical Loading Test

The ability to withstand both parallel and perpendicular to plane loads being applied to the door.  
Passed 6KN load

### Material Specification



2mm S275 Steel	Suitable for 2.5mm door thresholds
Coating	Black Powder Coated
Product Weight	4kg

### Packaging

**Boxed version**  
1 lock per inner box


### Maintenance

Wipe the surface periodically with a soft cloth to remove excess grease or moisture.

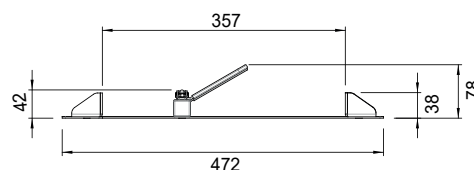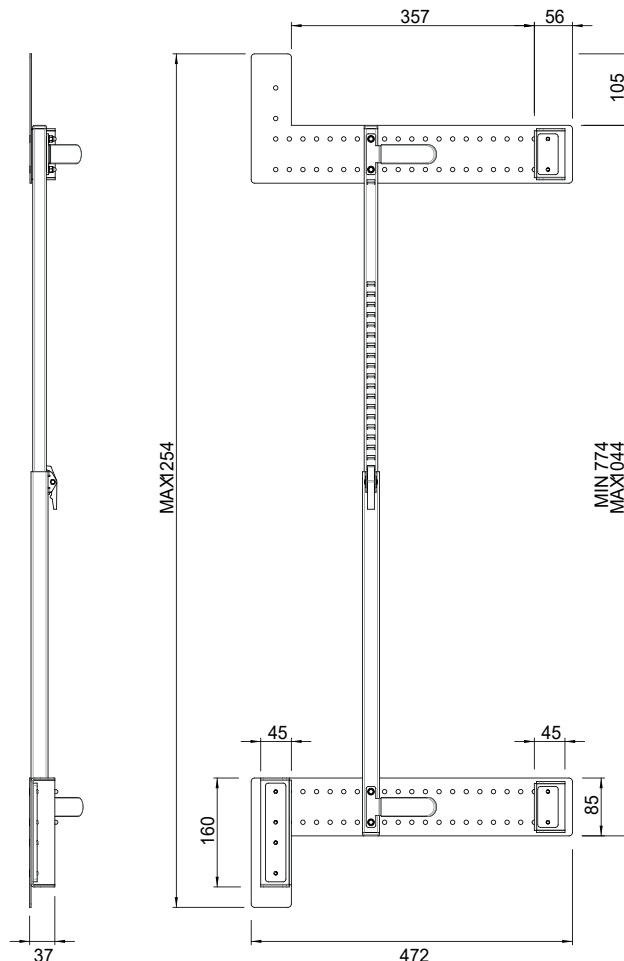


### Inward Swinging Door

View from the outside

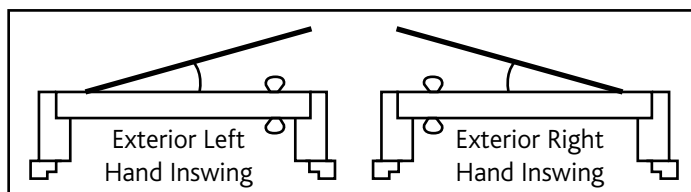

### Outward Swinging Door

View from the outside

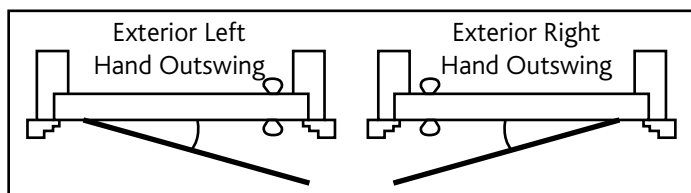

All dimensions are in mm and are nominal.  
ERA reserves the right to change specification without notice.  
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.