

# **Balmoral Offset Snib Lever Pad**



### **Features**

- Solid die cast construction with heavy duty spring cassette Sturdy feel and consistent 90 degree lever return
- Sculpted ergonomic lever and low friction nylon bush
   Easy to grip and smooth action
- Supplied with screw and spindle pack to suit 60-70mm profiles
   Everything needed for installation included
- Colour coordinated screw heads
   Perfectly matching hardware, even down to the smallest details
- Wide backplate
   To suit cylinder guards and accommodate larger cylinder preparation
- Supplied with care instructions
  Helps the homeowner to keep the hardware in optimal condition
- Supplied fully assembled
   Simple and quick installation, no need to fit springs or lever
- Silicon Site-Protectors available
   Ensures perfect condition after installation
- Each part packaged in a separate chamber, but supplied as a set
  No scratching of parts during transit
















## **Balmoral Offset Snib Lever Pad**

Ordering Details		
Product		
Balmoral Offset Snib Lever Pad		
Finish	Part No.	
Hardex Chrome	1D351	
Hardex Satin	1D352	
Hardex Bronze	1D353	
Hardex Gold	1D355	
Hardex Graphite	1D358	
Antique Black	1D356	
White	1A200	
Black	1A201	
Silver	1A202	

Technical Information	
	N 1670:2007 Grade 5 (480 hours)
<b>Operation</b> Endurance tested in excess of 20	00,000 cycles
Performance Tested to meet the requirement	ts of PAS 24 as part of a compliant door set
<b>Material Specificatio</b>	n
Handle Grip and Backplate:	High quality Zinc for all Hardex finishes and Antique Black. High quality Aluminium for White, Black and Silver finishes
Coatings:	Hardex Chrome, Hardex Satin, Hardex Bronze, Hardex Gold, Hardex Graphite, Antique Black, White, Black and Silver
Spindle / Screws:	Machine screws with colour coordinated heads for handle. 60mm - 70mm profiles (2 x 8mm x 90mm spindle, 2 x M5 x 70mm and 2x M5 x 80mm screws)
Cylinder:	Euro Cylinder, 92mm / 62mm PZ

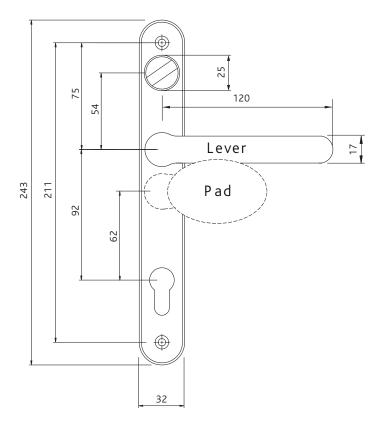

All dimensions are in mm and are nominal. Fab&Fix reserves the right to change specification without notice It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

#### Maintenance

For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

### **Packaging**

Individually bagged with screws, spindle and care instructions. 15 handles in an outer box.