


ERA Lockdown - Double Door



Features

- Fast and easy to deploy emergency barricade device
- Suitable for inward and outward swinging double doors up to 60mm thick
- Securely locks to protect a room and occupants from outside forced entry
- Free standing secondary lightweight device (only 3kg) easily transferrable to another access point if required
- Tested to PAS24 Impact Resistance Standards
- Includes wall fixings for fast access and deployment

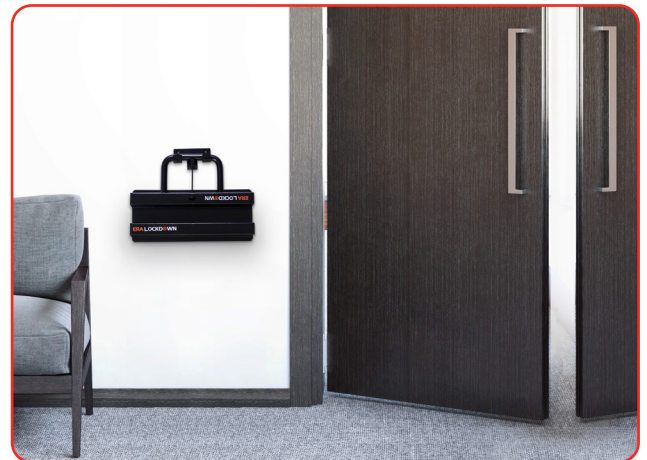

ERA Lockdown - Double Door

Ordering Details

ERA Lockdown - Double Door

Product	Part No.
ERA Lockdown Double Door 50mm	ERA-LOCKDOWN-DBL-50
ERA Lockdown Double Door 60mm	ERA-LOCKDOWN-DBL-60

Technical Information

Hard Body Impact Test

Hard body impact is made to vulnerable areas of the door assembly to test its ability to withstand the impact.

Passed 50kg

Mechanical Loading Test

The ability to withstand both parallel and perpendicular to plane loads being applied to the door.

Passed 4KN load

Material Specification

2mm S275 Steel	Suitable for 2.5mm door thresholds
Coating	Black Powder Coated
Product Weight	3kg



Packaging

Boxed version

1 lock per inner box

Maintenance

Wipe the surface periodically with a soft cloth to remove excess grease or moisture.

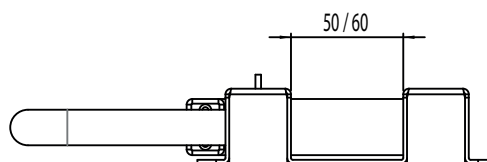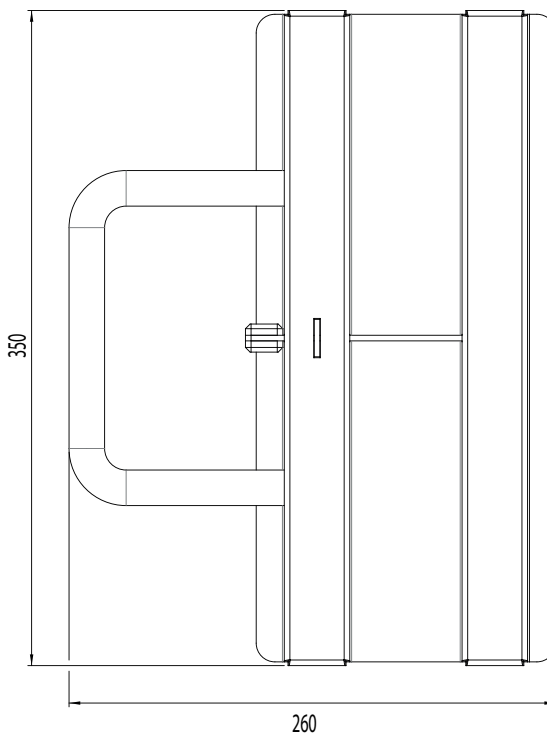

All dimensions are in mm and are nominal.
ERA reserves the right to change specification without notice
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.