

PostGUARD

Range of Letterbox Safety Products



Fitting Information & Instructions

All of our letterbox safety devices share the same overall dimensions and are fitted in the same manner.


MailGUARDPlus, MailGUARD, HomeGuard and PostGUARD can be fitted to almost any door with a horizontal letterbox. They can be installed and removed quickly and easily by most people with a minimum of tools and expertise.

All models are supplied with fitting instructions and a drilling template and are fitted as follows:

1. Fit the template centrally over the letterbox on the inside of the door (Aperture size 315 x 80mm).
2. Mark the 4 screw fixing holes through the template onto the door.
3. Remove the template.
4. Drill 4 small pilot holes in the door where marked.
5. Screw the 4 fixing screws (supplied) halfway into the pilot holes.
6. Mount the unit onto the screws via the keyhole slots in the frame.
7. Open zip in the bag and metal flap to expose fixing screws.
8. Screw the fixing screws tightly home.

The unit is then ready for use.

The unit can be easily removed and re-fitted to another door.

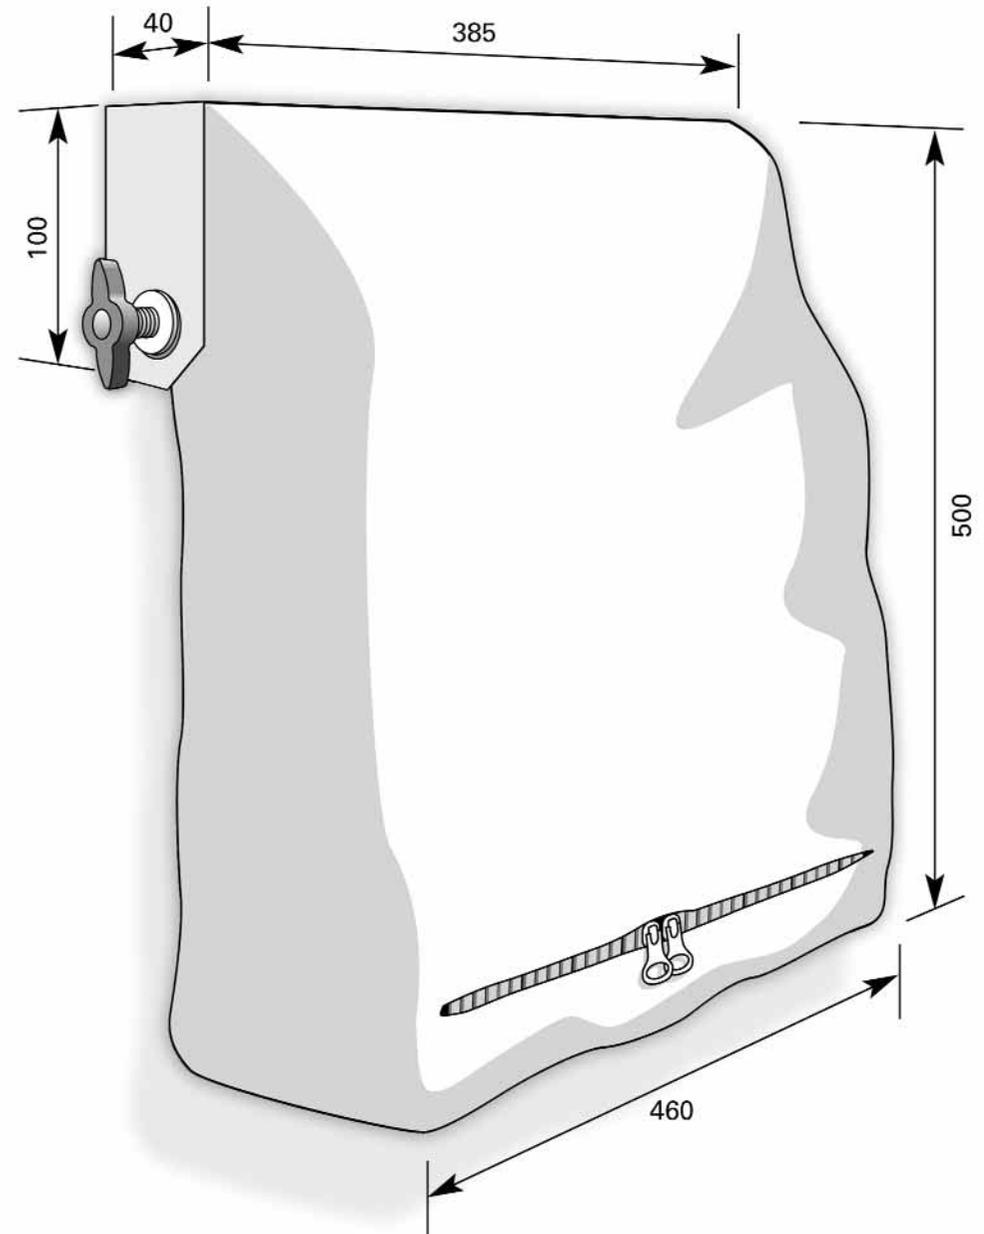

Dimensions shown in millimetres