

Balmoral Offset Snib Lever Lever



Features

- Solid die cast construction with heavy duty spring cassette Sturdy feel and consistent 90 degree lever return
- Sculpted ergonomic lever and low friction nylon bush Easy to grip and smooth action
- Supplied with screw and spindle pack to suit 60-70mm profiles
 Everything needed for installation included
- Colour coordinated screw heads
 Perfectly matching hardware, even down to the smallest details
- Wide backplate
 To suit cylinder guards and accommodate larger cylinder preparation
- Supplied with care instructions
 Helps the homeowner to keep the hardware in optimal condition
- Supplied fully assembled
 Simple and quick installation, no need to fit springs or lever
- Silicon Site-Protectors available
 Ensures perfect condition after installation
- Each part packaged in a separate chamber, but supplied as a set No scratching of parts during transit














Balmoral Offset Snib Lever Lever

Ordering Details Product Balmoral Offset Snib Lever Lever			
		Finish	Part No.
		Hardex Chrome	1D301
Hardex Satin	1D302		
Hardex Bronze	1D303		
Hardex Gold	1D305		
Hardex Graphite	1D308		
Antique Black	1D306		
White	1A350		
Black	1A351		
Silver	1A352		

Technical Information	on
Corrosion resistance Meets the requirements of BS El	N 1670:2007 Grade 5 (480 hours)
Operation Endurance tested in excess of 20	00,000 cycles
Performance Tested to meet the requirement	s of PAS 24 as part of a compliant door set
Material Specificatio	n
Handle Grip and Backplate:	High quality Zinc for all Hardex finishes and Antique Black. High quality Aluminium for White, Black and Silver finishes
Coatings:	Hardex Chrome, Hardex Satin, Hardex Bronze, Hardex Gold, Hardex Graphite, Antique Black, White, Black and Silver
Spindle / Screws:	Machine screws with colour coordinated heads for handle. 60mm - 70mm profiles (2 x 8mm x 120mm spindle; 2 x M5 x 70mm and 2x M5 x 80mm screws)
Cylinder:	Euro Cylinder, 92mm / 62mm PZ

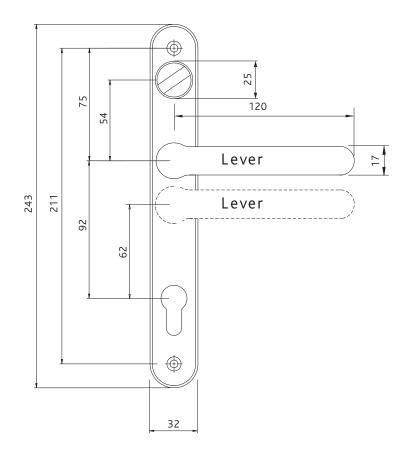

All dimensions are in mm and are nominal. Fab&Fix reserves the right to change specification without notice It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

Maintenance

For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

Packaging

Handles Individually bagged with screws, spindle and care instructions. 15 handles in an outer box.