CASEMENT WINDOWS

FM Shootbolt



Features

- A multi-point locking solution suitable for most PVCu windows
- The unique combination of a robust central deadlock, bi-directional bars and profile keeps offers a cost effective solution for window security
- The bi-directional bolts secure window to the outer frame locating into profile keeps
- Exceptional durability and versatility with bars supplied in a range of 5 lengths, easily cropped to size
- Die cast zinc or composite keeps available to suit





CASEMENT WINDOWS

FM Shootbolt

Ordering Details Gearboxes Latch Height **Backset** Part No. 9.5mm 20mm WLS5ZY11060950 11.5mm 20mm WLS5ZY11061150 20mm WLS5ZY11061350 13.5mm 9.5mm 22mm WLS5ZY1105095A 11.5mm 22mm WLS5ZY1105115A WLS5ZY1105135A 13.5mm 22mm **Bars** Size Sash Rebate Size Part No. WLZRZY6040 280mm 330-640mm 2 410mm 590-900mm WLZRZY6041 3 540mm 850-1160mm WLZRZY6042 670mm 1110-1420mm WLZRZY6043 5 800mm 1370-1680mm WLZRZY6044

Kits and Keeps - please contact sales for details

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670: 2007 (Grade 3)

Operation


Tested in excess of 30,000 cycles

Material Specification	
Gearbox:	High strength Zinc Alloy
Bars:	High quality Steel, Zinc coated and yellow passivated
Keeps:	Die cast Zinc Alloy, yellow passivated

Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

Packaging
Gearboxes 25 locks per box
Bars 25 pairs per box
Keeps 25 centre keeps per box. 25 pairs end keeps per box
Kits 50 kits per box

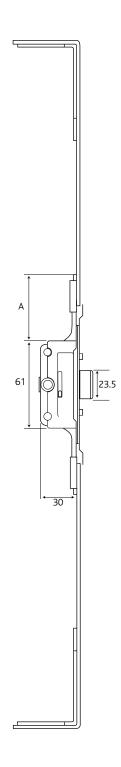

All dimensions are in mm.

ERA reserves the right to change specification without notice. It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification.