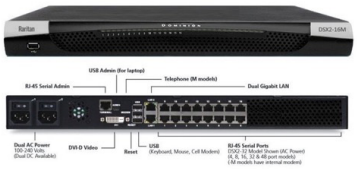

DESCRIPTION

TECHNICAL CHARACTERISTICS

Brand : RARITAN
Part number : DSX2-16M
Certificat :
Certification : CE, FCC 15 A, US UL
AC input frequency : 50 - 60 Hz
AC input voltage : 100-240 V
Authentication method : Radius
Console port : RJ-45
Ethernet LAN (RJ-45) ports : 16
Input current : 0.35 A
Internal modem : Y
Management protocols : SNMP
Operating relative humidity (H-H) : 20 - 85%
Operating temperature (T-T) : 0 - 50 °C
Power consumption (typical) : 22 W
Power source type : AC
Rack mounting : Y
Security algorithms : 802.1x RADIUS
Storage relative humidity (H-H) : 10 - 90%
Storage temperature (T-T) : 0 - 55 °C
USB 2:0 ports quantity : 4