


5 port 10/100/1000TX unmanaged switch with internal power supply EU Power Adapte

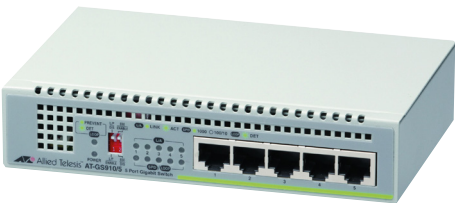

DESCRIPTION

The Allied Telesis GS910 Series offers unmanaged Gigabit switching solutions for the desktop, and small networks. The series has internal and external power supply versions, and also features network loop guard technology, which automatically detects any unexpected network loops, and prevents network devices from broadcast packet storms.

With minimal to no set-up, GS910 Series switches provide simple and seamless connectivity to existing network infrastructure. Each unmanaged switch is backed with a lifetime limited warranty.

TECHNICAL CHARACTERISTICS

Brand : ALLIED TELESIS
Part number : AT-GS910/5-50
10G support : N
AC input frequency : 50 - 60 Hz
AC input voltage : 100 - 240 V
Basic switching RJ-45 Ethernet ports quantity : 5
Basic switching RJ-45 Ethernet ports type : Gigabit Ethernet (10/100/1000)
BPDU filtering/protection : Y
Broadcast storm control : Y
Cable length detection : Y
Depth : 105 mm
Flow control support : Y
Gigabit Ethernet (copper) ports quantity : 5
Harmonized System (HS) code : 85176990
Height : 35 mm
Jumbo frames support : Y
Loop protection : Y
MAC address table : 2000 entries
Networking standards : IEEE 802.3, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x
Operating temperature (T-T) : 0 - 50 °C
Packet forwarding rate (1 Gbps) : 1488000 pps
Packet forwarding rate (10 Mbps) : 14880 pps

Packet forwarding rate (100 Mbps) : 148800 pps
Power consumption (max) : 3.1 W
Power over Ethernet (PoE) : N
Product colour : Grey
Rack mounting : N
Switch type : Unmanaged
Switching capacity : 10 Gbit/s
Throughput : 7.4 Mpps
Weight : 500 g
Width : 160 mm