


# LG videowall 49" 49VLP5J

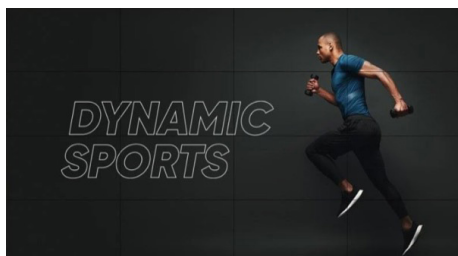

## DESCRIPTION

## TECHNICAL CHARACTERISTICS

Brand : LG

Part number : 49VL5PJ

### Représentation / réalisation :

HDCP : Y

AC input frequency : 50/60 Hz

AC input voltage : 100 - 240 V

Audio (L/R) in : 1

Audio (L/R) out : 1

Batteries included : Y

Bezel width (bottom) : 1.25 mm

Bezel width (side) : 2.25 mm

Bezel width (top) : 2.25 mm

Browsing : Y

Cables included : AC, DisplayPort, IR sensor, LAN (RJ-45), RS-232

Contrast ratio (dynamic) : 500000:1

Contrast ratio (typical) : 1000:1

Display brightness : 500 cd/m<sup>2</sup>

Display depth : 89.7 mm

Display diagonal : 124.5 cm (49«)

Display diagonal (metric) : 123.2 cm

Display height : 607.8 mm

Display number of colours : 1.07 billion colours

Display resolution : 1920 x 1080 pixels

Display technology : IPS

Display weight : 17.8 kg

Display width : 1077.6 mm

DisplayPorts quantity : 1

DVI port : Y
Energy consumption (SDR) per 1000 hours : 73.2 kWh
Energy efficiency class (SDR) : G
Energy efficiency scale : A to G
Ethernet LAN : Y
Ethernet LAN (RJ-45) ports : 1
Haze rate : 3%
HD type : Full HD
HDCP version : 2.2
HDMI ports quantity : 2
HDMI version : 2.2
Heat dissipation : 375 BTU/h
Heat dissipation (max) : 409 BTU/h
Internal memory : 8 MB
International Protection (IP) code : IP5X
LED backlighting type : Direct-LED
Mounting kit : Y
Native aspect ratio : 16:9
Native refresh rate : 60 Hz
Number of OSD languages : 21
On Screen Display (OSD) : Y
On Screen Display (OSD) languages : Arabic, Simplified Chinese, Traditional Chinese, Czech, Danish, German, Dutch, English, Spanish, Finnish, French, Greek, Italian, Japanese, Korean, Norwegian, Portuguese, Russian, Swedish, Turkish
Operating hours (hours/days) : 24/7
Operating relative humidity (H-H) : 10 - 80%
Operating system installed : Web OS
Operating temperature (T-T) : 0 - 40 °C
Orientation : Horizontal
Package depth : 756 mm
Package height : 247 mm
Package weight : 21.9 kg
Package width : 1198 mm
Panel mounting interface : 600 x 400 mm
Panel type : LCD
Placement supported : Indoor
Power consumption (off) : 0.5 W
Power consumption (standby) : 0.5 W
Power consumption (typical) : 110 W
Product colour : Black
Product design : Digital signage flat panel
Purpose : Universal
Rated lifetime : 60000 h
Remote (IR) input : 1
Remote control included : Y
Response time : 8 ms
RS-232 interface : Y
Sustainability certificates : CE, ENERGY STAR
Touchscreen : N
USB port : Y
USB ports quantity : 1
USB version : 2.0
VESA mounting : Y
Viewing angle, horizontal : 178°

Viewing angle, vertical : 178°