



Silencers



Plastic Silencers



Code	F	H	D	L
YPS-18	1/8"	6	16	31
YPS-14	1/4"	8	20	43
YPS-38	3/8"	9.5	24	56
YPS-12	1/2"	10	24	56
YPS-34	3/4"	18	49	114
YPS-1	1"	18	49	114






Technical Characteristics

Maximum pressure: 10 bar
Minimum temperature: -15°C
Maximum temperature: +100°C
Filtration threshold: 75 µm

Code	A	F	H	D
PS-M5	M5	4	23	6.5
PS-18	1/8"	6	34	12.5
PS-14	1/4"	7	42.5	15.5
PS-38	3/8"	11.5	66	25.1
PS-12	1/2"	11	70	23.5
PS-34	3/4"	15.5	130	38.5

In the diagram is shown the frequency distribution of the sound energy in an 6 bar air jet from a typical 1/2" control valve exhaust port. The critical region is that between 1 and 4 KHz, the range where psychological effects at high noise levels are most damaging. Sound reduction for this silencer is approx mately 20-25 dB at 6 bar working pressure.

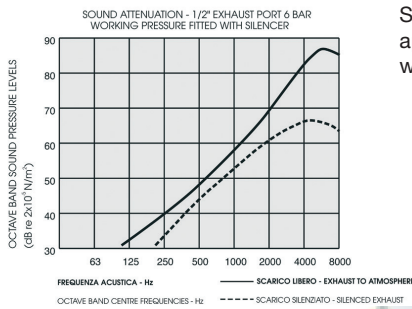


Technical Characteristics

Maximum pressure: 10 bar
Minimum temperature: -15°C
Maximum temperature: +100°C
Filtration threshold: 75 µm


Code	A	F	H	CH1	CH2
RS-18	1/8"	6	20.5	13	2.5
RS-14	1/4"	7	29	15	4
RS-38	3/8"	8	38	20	6
RS-12	1/2"	10	50	25	8

Silencers

Plastic Silencers



Code	A	F	H	D
S03STPI-6	6	17	45	13
S03WBPI-8	8	18	43.5	14
S04STPI-10	10	22.7	57.5	16
S05STPI-12	12	24.5	82	19




Technical Characteristics

Maximum pressure: 6 bar
Minimum temperature: -10°C
Maximum temperature: +50°C

dB = Noise level in (dB) at 6 bar

Code	F	H	D	L	dB
7070-1/8	1/8"	6	15	32.5	87
7070-1/4	1/4"	8	19.5	43	84
7070-3/8	3/8"	11	24.5	58	90
7070-1/2	1/2"	11	24.5	58	90
7070-3/4	3/4"	18	48	115	91
7070-1	1"	18	48	115	90



Technical Characteristics

Maximum pressure: 6 bar
Minimum temperature: -10°C
Maximum temperature: +70°C

dB = Noise level in (dB) at 6 bar

Code	F	H	D	L	CH	dB
7080-1/8	1/8"	6	16	34	2	87
7080-1/4	1/4"	8	19	44	12	90
7080-3/8	3/8"	10	24	56	17	92
7080-1/2	1/2"	10	24	56	17	92
7080-3/4*	3/4"	18	48	115	-	-
7080-1*	1"	18	48	115	-	-

***Slotted Head**