


0446 - BALL VALVE DOUBLE FEMALE PANEL MOUNTED

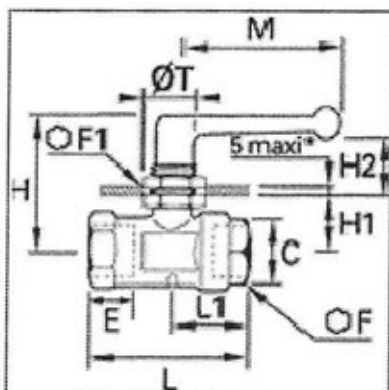

A simple quarter turn of the handle opens and closes this panel-mountable ball valve.

- full flow
- optimum sealing due to compensating "O" rings
- excellent resistance to scaling due to ball seal configuration

maximum working pressure	20 bar 2 MPa 290 psi
working temperature	-20 to 80 °C -4 to 176 °F 253 to 353 °K
adjustment screw	NICKEL PLATED BRASS
body	NICKEL PLATED BRASS
retaining nut	NICKEL PLATED BRASS
stem	BRASS
stem seal	NBR
'O'-rings	NBR
ball seal	NBR
handle	ZAMAK

Part No	C	E (mm)	F (mm)	F1 (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L1 (mm)	M (mm)	ØT (mm)
LE-0446 04 10	G1/8	8	14	22	37	14	12	44	25	48	16.5
LE-0446 07 13	G1/4	12	19	24	45	19	14	53	28	48	20.5
LE-0446 10 17	G3/8	12	24	27	50	21	21	59	31	69	20.5
LE-0446 13 21	G1/2	15	27	27	51	23	21	67	34	69	20.5