


Super Heavy-Duty Hose Clamp W1

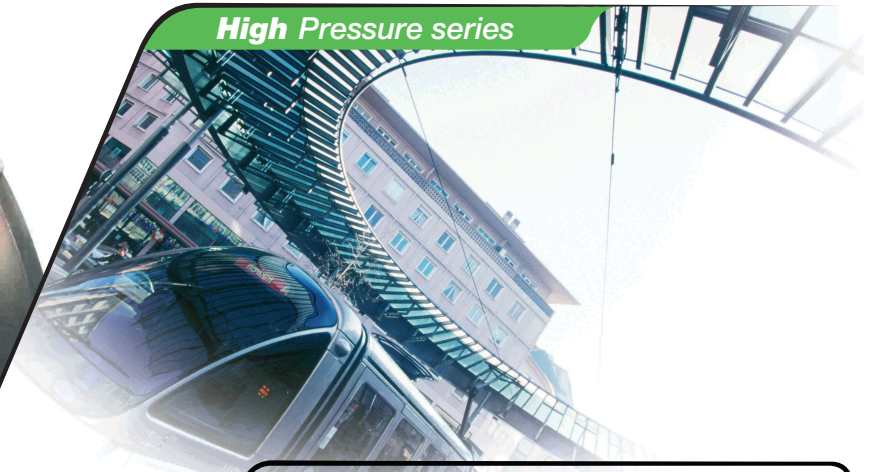

Super Heavy-duty hose clamp W1

Information	Ø Application d mm	Reference W1	r	e	a	b	s	Max. Values* Torque Nm	Max. Values* Pressure (Bars)	Box Quantity	Packing
Mikalor was the first company to design and produce a heavy-duty hose clamp, and since then the Super clamp has gone from strength to strength. The high strength 8.8 grade steel nut and T-bolt mean that Super can be tightened up hard using many different kinds of tool, while the beveled edges protect the hose from harm. The Super clamp is in its element in agricultural applications, waste water extraction, mining, quarrying or on other sectors where a rugged yet competitively priced heavy-duty clamp is required.	17-19	03018263	M6	8	18 ^{+0.2}	19,8	0,6	10	45	50	400
	20-22	03018271	M6	8	18 ^{+0.2}	19,8	0,6	10	45	50	400
	23-25	03018280	M6	8	18 ^{+0.2}	19,8	0,6	10	45	50	400
	26-28	03018298	M6	8	18 ^{+0.2}	19,8	0,6	10	45	50	400
	29-31	03018300	M6	8	18 ^{+0.2}	19,8	0,8	10	45	50	400
	32-35	03018319	M6	8	18 ^{+0.2}	19,8	0,8	10	45	50	200
	36-39	03018327	M7	10	20 ^{+0.3}	22	0,8	12	40	50	50
	40-43	03018335	M7	10	20 ^{+0.3}	22	0,8	12	40	50	50
	44-47	03018010	M7	10	20 ^{+0.3}	22	1,2	12	40	50	50
	48-51	03018028	M7	10	20 ^{+0.3}	22	1,2	12	40	50	50
	52-55	03018036	M7	10	20 ^{+0.3}	22	1,2	12	40	50	50
	56-59	03018044	M7	10	20 ^{+0.3}	22	1,2	12	40	50	50
	60-63	03018052	M7	10	20 ^{+0.3}	22	1,2	16	36	50	50
	64-67	03018060	M7	10	20 ^{+0.3}	22	1,2	16	36	25	25
	68-73	03018079	M7	10	20 ^{+0.3}	22	1,5	16	36	25	25
	74-79	03018087	M7	10	20 ^{+0.3}	22	1,5	16	36	25	25
	80-85	03018095	M7	10	20 ^{+0.3}	22	1,5	16	36	25	25
	86-91	03018108	M8	13	25 ^{+0.4}	27,5	1,5	30	28	25	25
	92-97	03018116	M8	13	25 ^{+0.4}	27,5	1,5	30	28	25	25
	98-103	03018124	M8	13	25 ^{+0.4}	27,5	1,5	30	28	25	25
104-112	03018132	M8	13	25 ^{+0.4}	27,5	1,5	30	20	25	25	
113-121	03018140	M8	13	25 ^{+0.4}	27,5	1,5	30	20	25	25	
122-130	03018159	M8	13	25 ^{+0.4}	27,5	1,5	30	20	25	25	
131-139	03018167	M8	13	25 ^{+0.4}	27,5	1,7	30	12	25	25	
140-148	03018175	M8	13	25 ^{+0.4}	27,5	1,7	30	12	25	25	
149-161	03018183	M8	13	25 ^{+0.4}	27,5	1,7	30	12	25	25	
162-174	03018191	M10	15	28 ^{+0.4}	31	1,7	45	9	10	10	
175-187	03018204	M10	15	28 ^{+0.4}	31	1,7	45	9	10	10	
188-200	03018212	M10	15	28 ^{+0.4}	31	1,7	45	9	10	10	
201-213	03018220	M10	15	28 ^{+0.4}	31	1,7	45	6	10	10	
214-226	03018239	M10	15	28 ^{+0.4}	31	1,7	45	6	10	10	
227-239	03018247	M10	15	28 ^{+0.4}	31	1,7	45	6	10	10	
240-252	03018255	M10	15	28 ^{+0.4}	31	1,7	45	3	10	10	

*The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

Patented Worldwide

Materials W1

T-Bolt:

8.8 grade steel
Yellow-zinc plated

Band and Bridge:

Mild steel
Yellow zinc-plated

Washer and Trunions:

Mild steel
Yellow zinc-plated

