


# Anti-vibration Mounts

## Bobbins

Mounts can be fixed in numerous ways with either internal, external or combination threads. These can be used in compression or shear. This range can accommodate loads from 8kg to 650kg, although we can offer from 2kg to 1,020kg on request.

- Natural rubber, zinc plated in accordance with CE standards, chrome VI free, white
- Stiffness tolerance: +/- 20%

**Applications:** measurement equipment, instruments, small machinery, engines, pumps and radiators.

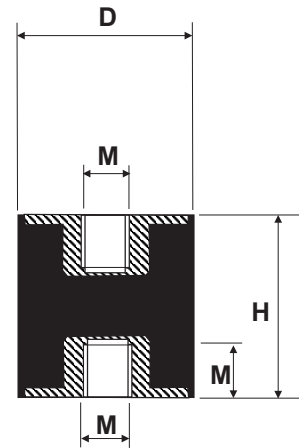

				FEMALE/FEMALE		
PART CODE	DIAMETER (D) mm	HEIGHT (H) mm	THREAD (M) mm	Compression Stiffness Rate Kg/mm	Max Static Deflection mm	Max. Operating Load Kg
FFB-1615	16	15	M4	8.8	3	26.3
FFB-2020	20	20	M6	8.8	4	35.1
FFB-2525	25	25	M6	12.1	5	60.7
FFB-3020	30	20	M8	24.5	4	97.9
FFB-3030	30	30	M8	11.7	6	70.4
FFB-4030	40	30	M8	25.5	6	153
FFB-4040	40	40	M10	16.1	8	128.9
FFB-5040	50	40	M10	27.6	8	221.1
FFB-5050	50	50	M10	18.2	8	145.2
FFB-7550	75	50	M12	64.9	10	648.5