


Inox 200



Technical Data



INOX 200 is a single component protective coating with the look of Stainless Steel. Inox 200 forms a flexible protective natural film which, when dry, matches the surface finish of Stainless Steel. Inox 200 is especially effective for the cosmetic touch-up of damaged/repaired Stainless Steel, particularly discolouration due to high temperature welding.

FEATURES

- Excellent touch-up for welding seams on stainless steel structures
- Provides a closed durable film
- Unique combination of flexibility and hardness
- Adheres extremely well to stainless steel surfaces
- Totally free of lead.
- Quick drying
- The aerosol uses LPG propellant for controlled spray and optimum film properties.


APPLICATIONS

Touch up of discoloration on stainless steel, due to heat (as from welding).


- Safety equipment
- Piping and couplings
- Containers
- Furniture, home and garden equipment
- Machinery construction and industrial vehicles
- Building and metallic structures

DIRECTIONS

- Shake aerosol can well for at least one minute after agitator ball is free. Repeat frequently while using.
- Apply to a clean, degreased, dry surface for best results. Remove rust and scale with a wire brush.
- Apply in light, even coats; best results are obtained with 2 lighter rather than 1 heavy coat.
- Additional coats can be applied after 5 minutes.
- When spraying is finished, clean aerosol valve by turning can upside down and press button until only propellant escapes. If clogging occurs, remove button and clean orifice with a fine wire.
- Do not use on energized equipment. Use in well ventilated area.

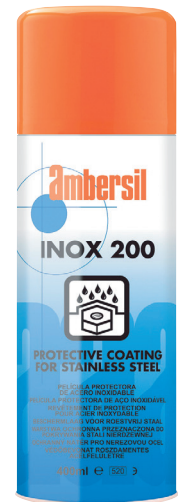

PART NUMBER:
6190011513



Note: For welding purposes it is always better to use a stainless steel alloy with low carbon content such as 304L or 306L. These types of alloys maintain a good natural barrier against corrosion.

TECHNICAL DATA

Appearance	: Lustre aspect of stainless steel
Specific Gravity (ASTM D891-59)	: 1.0 g/cm ³
Solid Content (ASTM D-1644 ISO 1515)	: 30 ± 2 %
Pigment	: stainless steel powder composed of 17% Cr, 13% Ni, 2.25% Mo, 67.75% Fe
Coverage (40 µm dry film)	: 2.5 m ² /can

Application Conditions

Minimum Ambient Temperature	: 8°C
Minimum Surface Temperature	: 5 °C
Maximum Humidity	: 85% RH

Drying Time

Dry-To-Touch	: 10 minutes
Totally Dry	: 30 minutes
Dry Film Properties (40-60 µm)	:
Adhesion on Galvanized Steel (ASTM D3359)	: 0 B
Heat Resistance (ASTM D2485-68.)	: Approx. 300°C
Packaging	: 12 x 400 ml

STORAGE

The product may be stored at normal ambient temperatures and has a shelf life of not less than 24 months with correct storage. Aerosols should always be stored below 50°C, away from direct heat and naked flame.

HEALTH AND SAFETY

Health and Safety sheet available separately.

TECHNICAL SERVICE

CRC Industries UK Ltd provides a technical support service and maintains a constant programme of research and development. We are able to assist customers by specific product development to meet particular requirements.

MISREPRESENTATION ACT 1967

The information given in this publication is based on our experience and reports from customers. There are many factors outside our control and knowledge which affect the use and performance of our products and for which reason no warranty is given, express or implied. Users should make their own tests to determine the applicability of such information or the suitability of any products for their own particular purposes. Statements concerning the use of the products described herein are not to be construed as recommending the infringement of any patent and no liability for infringement arising out of any such use is to be assumed.

TRADE DESCRIPTIONS ACT 1968