


# SOLENOID COILS

## Specification

Standard voltage	AC220V AC110V AC24V DC24V DC12V
Scope of voltage	AC $\pm 5\%$ DC $\pm 0\%$
Power consumption	AC 2.5VA DC 2.5W AC 3.5VA DC 3.0W
Protection	IP65 DIN40050
Temperature classification	B Class
Electrical entry	Terminal
Activating time	0.05 sec

## Ordering Code

K-12DC	12V DC
K-24DC	24V DC
K-24AC	24V 50/60Hz
K-110AC	110V 50/60Hz
K-220AC	220V 50/60Hz

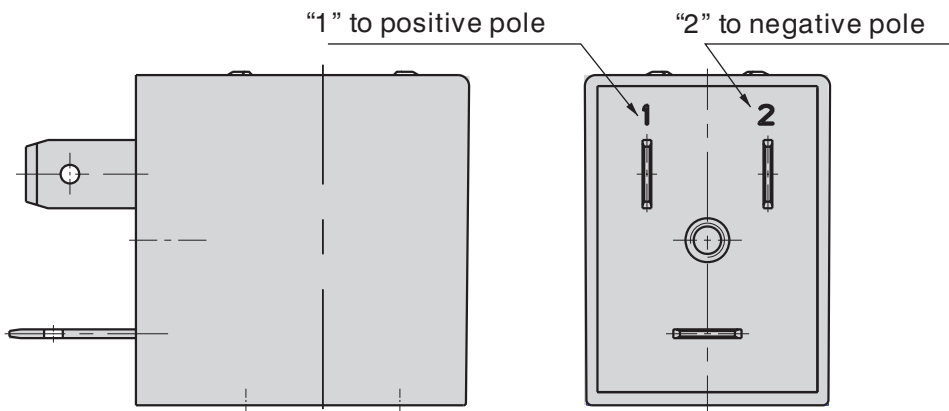

Coil terminal with DC specification has polar indicator lights, thus when wiring, please notice positive and negative poles, "1" shall be connected to positive pole, "2" to negative pole. If the poles are connected incorrectly, the indicator lights will not light up but the valve will still actuate.