




PF Series Drum/Barrel Pumps

Light to Medium Viscosity

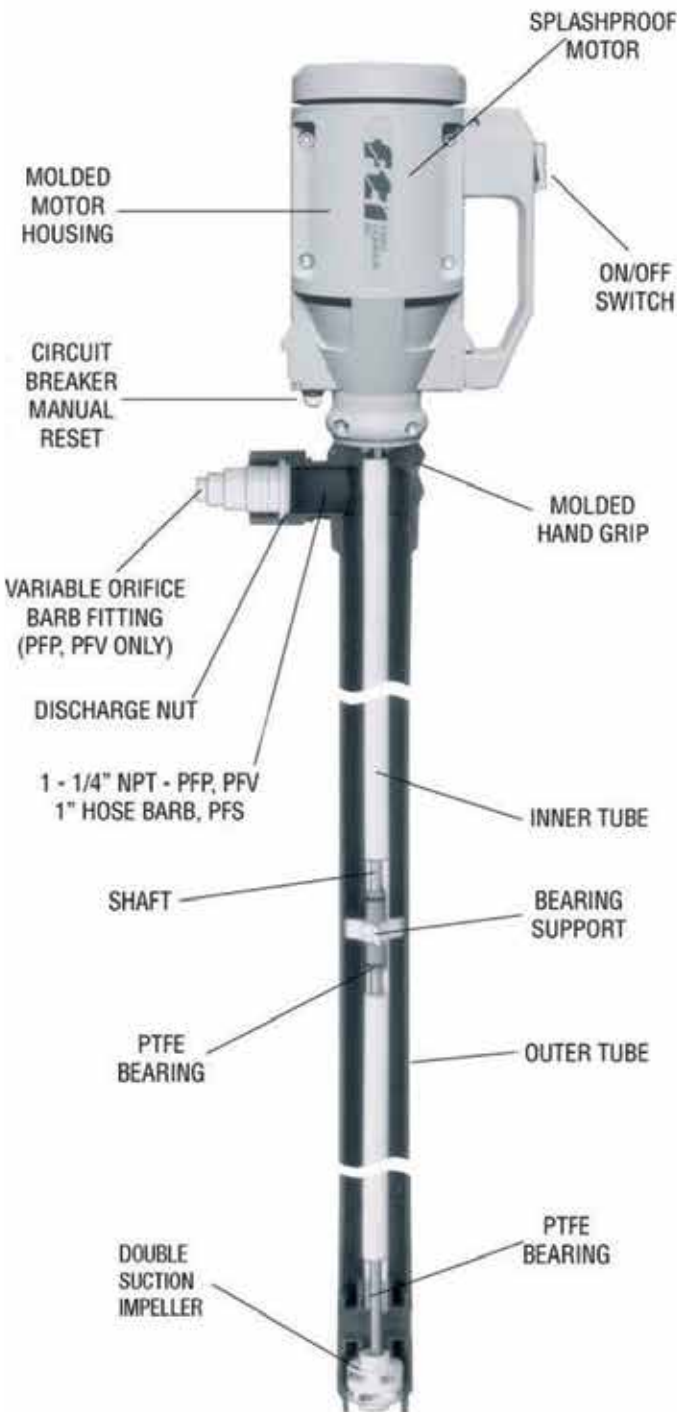

High performance, sealless drum/barrel pumps for container-to-container transfer of acids, corrosives, and chemicals.

Features

- Polypropylene, PVDF or 316SS tubes
- Unique double suction impeller
- Pump interchangeable with motors
- Up to 2000 cP with M58P and M59P 800w motors
- ATEX certified motors
- Dry run capability

Performance

- 1.83 SG
- Max. temperatures: PFP/PFM - 160°F (71°C)
PFV - 120°F (49°C); PFS - 220°F (105°C)
All 60" (152 cm) & 72" (183 cm) tubes - 120°F (49°C)

ELECTRIC - 50/60 Hz	AIR
• 40 gpm (151 lpm)	• 22 gpm (83 lpm)
• 80 feet TDH (24 m)	• 38 feet TDH (11.6 m)
• 2000 cP maximum	• 330 cP maximum

NOTE: Explosionproof motor performance is reduced to 7 gpm and 18 feet TDH maximum. This reduction helps to reduce static electricity.

