


CROMAX SPRING CHECK VALVE


Features



Guided Disc Design
 Available in 304 and 316 Stainless Steel
 Threaded End According to DIN 259
 Opening Pressure 0.03 Bar
 Maximum Working Pressure 16 Bar
 Working Temperature -20°C to +150°C

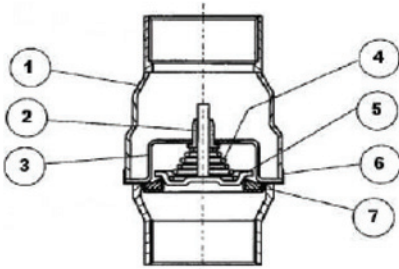

No.	Description	304 Materials	316 Materials
1	Body	304 SS	316 SS
2	Guide Bush	PTFE	316 SS
3	Guide Ring	304 SS	316 SS
4	Spring	316 SS	316 SS
5	Disc	316 SS	316 SS
6	Seal ring Housing	304 SS	316 SS
7	Seal ring	VITON	VITON

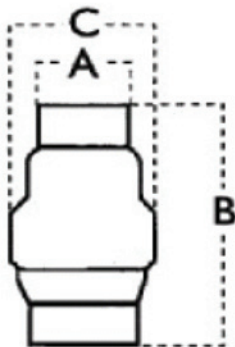

A	B	C	WEIGHT (Kg)
1/4" BSP	54	32	0.136
3/8" BSP	54	32	0.122
1/2" BSP	54	32	0.880
3/4" BSP	68	44	0.142
1" BSP	83	53	0.167
1 1/4" BSP	102	62	0.270
1 1/2" BSP	115	78	0.408
2" BSP	120	86	0.620
2 1/2" BSP	145	108	1.200
3" BSP	160	128	1.973
4" BSP	190	163	3.280

