


## 0483 - 3 WAY BALL VALVE, FEM. RIGHT ANGLED PORTING

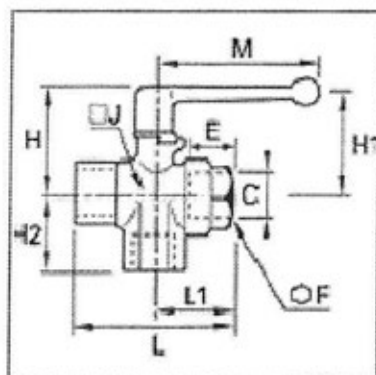

3-way ball valve with selectable fluid flow direction.  
 - full flow  
 - optimum sealing due to compensating "O" rings  
 - excellent resistance to scaling due to ball seal configuration

<b>maximum working pressure</b>	20 bar 2 MPa 290 psi
<b>working temperature</b>	-20 to 80 °C -4 to 176 °F 253 to 353 °K
<b>body</b>	NICKEL PLATED BRASS
<b>retaining nut</b>	NICKEL PLATED BRASS
<b>stem</b>	BRASS
<b>stem seal</b>	NBR
<b>'O'-rings</b>	NBR
<b>ball seal</b>	NBR
<b>handle</b>	ZAMAK

Part No	C	E (mm)	F (mm)	H (mm)	H1 (mm)	H2 (mm)	J (mm)	L (mm)	L1 (mm)	M (mm)
LE-0483 04 10	G1/8	8	14	35	29	18	14	44	25	48
LE-0483 06 13	G1/4	12	19	38	31	24	22	53	28	48
LE-0483 09 17	G3/8	12	24	45	43	27	25	59	31	69
LE-0483 12 21	G1/2	15	27	47	44	33	29	67	34	69