


## 6402 - DOUBLE FEMALE BALL VALVE FOR SCREW FIXING

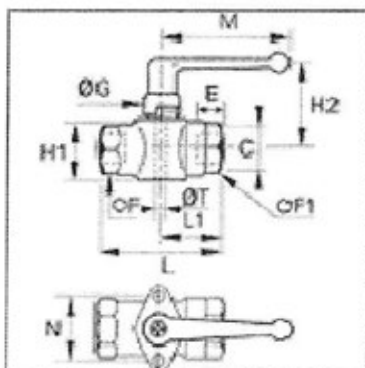

Mountable in-line ball valve for closing fluid systems with a simple quarter turn of the handle.

- full flow
- optimum sealing due to compensating "O" rings
- excellent resistance to scaling due to ball seal configuration

<b>maximum working pressure</b>	40 bar 4 MPa 580 psi
<b>working temperature</b>	-20 to 80 °C -4 to 176 °F 253 to 353 °K
<b>body</b>	NICKEL PLATED BRASS
<b>retaining nut</b>	NICKEL PLATED BRASS
<b>stem</b>	BRASS
<b>stem seal</b>	NBR
<b>'O'-rings</b>	NBR
<b>ball seal</b>	NBR
<b>handle</b>	ZAMAK

Part No	C	E (mm)	F (mm)	F1 (mm)	ØG (mm)	H1 (mm)	H2 (mm)	L (mm)	L1 (mm)	M (mm)	N (mm)	ØT (mm)
LE-6402 04 10	G1/8	8	14	14	18	18	30	44	25	48	25	X
LE-6402 07 13	G1/4	12	19	19	19	24	31	53	28	48	31	X
LE-6402 10 17	G3/8	12	24	24	20	30	45	59	31	69	31	X
LE-6402 13 21	G1/2	15	27	27	20	34	47	67	34	69	34	X
LE-6402 20 27	G3/4	16.5	32	38	27	44	52	80	39	108	43	X
LE-6402 23 34	G1	19	41	46	27	53	56	94	47	108	51	X