

Water Delivery Hose



Cold Bend: -45°C

Vacuum: 570mm Hg = 75% at 20°C

Applications: Delivery and light suction of water, slurry, chemicals, some granules, sewage and other waste matter. Particularly suitable for the horticultural and marine industries.



Pressures: Values given are based on the short term burst pressure of the hose at 20°C based on a 3:1 safety factor.

Chemical Resistance: Resistant to most oxidising and reducing agents and diluted acids and alkalis. For more detailed information please contact technical sales.

Note: Any increase in temperature above 20°C will result in a decline in working pressure values.



Temperature Range:
-15°C to +65°C

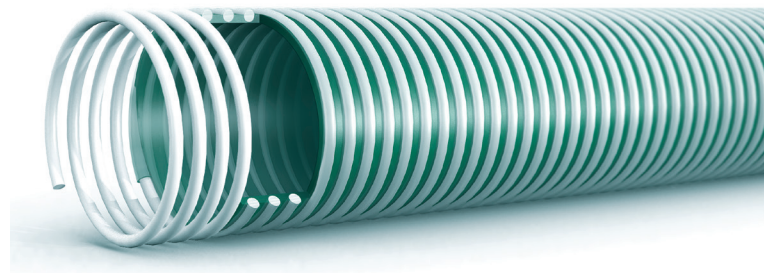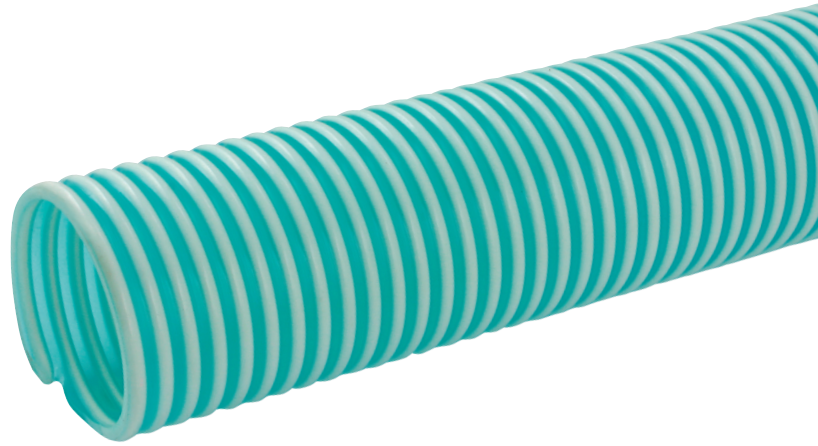

PART NUMBER	ID	OD	W.P.(BAR)	B.P.(BAR)	WEIGHT(KG)
WDH34-10	19	23.8	8	35	2.7
WDH34-30	19	23.8	8	35	8.0
WDH1-10	25	29.8	8	32	3.7
WDH1-30	25	29.8	8	32	11.0
WDH114-10	32	37.2	8	30	4.7
WDH114-30	32	37.2	8	30	14.0
WDH112-10	38	44	8	26	5.0
WDH112-30	38	44	8	26	15.0
WDH2-10	51	58.2	7	24	6.7
WDH2-30	51	58.2	7	24	20.0
WDH212-10	64	71.4	6	20	10.3
WDH212-30	64	71.4	6	20	31.0
WDH3-10	76	84.2	5	20	11.9
WDH3-30	76	84.2	5	20	35.8
WDH4-10	102	113.6	5	16	20.7
WDH4-30	102	113.6	5	16	62.0