


**P-KV .....**

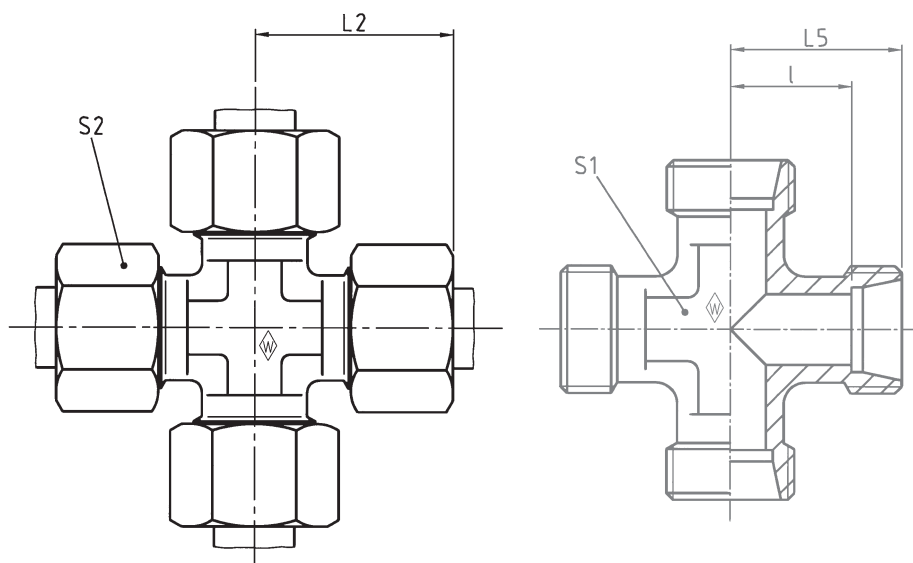

Series	bar	Tube OD	Type	Reference	kg per 100 pcs.	L <sub>2</sub>	L <sub>5</sub>	l	S <sub>1</sub>	S <sub>2</sub>	
Reihe	PN	Rohr-AD	Typ	Best.-Nr.	kg per 100 St.						
Série	(psi)	Tube Ø ext.	Désignation	Réf.	kg par 100 p.						
LL	100 (1450)	4	<b>S-KV 4 LL</b>	<b>WAL038624</b>	3,0	21	15	11	9	10	
		6	<b>S-KV 6 LL</b>	<b>WAL038626</b>	4,0	21	15	9,5	9	12	
		8	<b>S-KV 8 LL</b>	<b>WAL038627</b>	6,0	23	17	11,5	12	14	
L	500 (7252)	6	<b>P-KV 6 L</b>	<b>WAL373431</b>	7,7	27	19	12	12	14	
		8	<b>P-KV 8 L</b>	<b>WAL373432</b>	10,9	29	21	14	12	17	
		10	<b>P-KV 10 L</b>	<b>WAL373433</b>	15,5	30	22	15	14	19	
	400 (5801)	12	<b>P-KV 12 L</b>	<b>WAL373434</b>	19,2	32	24	17	17	22	
		15	<b>P-KV 15 L</b>	<b>WAL373435</b>	31,1	36	28	21	19	27	
		18	<b>P-KV 18 L</b>	<b>WAL373436</b>	48,3	40	31	23,5	24	32	
		22	<b>P-KV 22 L</b>	<b>WAL373437</b>	72,4	44	35	27,5	27	36	
		250 (3626)	28	<b>P-KV 28 L</b>	<b>WAL373438</b>	101,0	47	38	30,5	36	41
			35	<b>P-KV 35 L</b>	<b>WAL373439</b>	122,8	56	45	34,5	41	50
S	800 (11603)	42	<b>P-KV 42 L</b>	<b>WAL373440</b>	175,6	63	51	40	50	60	
		6	<b>P-KV 6 S</b>	<b>WAL373441</b>	12,3	31	23	16	12	17	
		8	<b>P-KV 8 S</b>	<b>WAL373442</b>	14,8	32	24	17	14	19	
	630 (9137)	10	<b>P-KV 10 S</b>	<b>WAL373443</b>	23,0	34	25	17,5	17	22	
		12	<b>P-KV 12 S</b>	<b>WAL373444</b>	28,2	38	29	21,5	17	24	
		14	<b>P-KV 14 S</b>	<b>WAL373445</b>	35,4	40	30	22	19	27	
		16	<b>P-KV 16 S</b>	<b>WAL373446</b>	45,1	43	33	24,5	24	30	
		420 (6091)	20	<b>P-KV 20 S</b>	<b>WAL373447</b>	70,4	48	37	26,5	27	36
			25	<b>P-KV 25 S</b>	<b>WAL373448</b>	125,7	54	42	30	36	46
	30		<b>P-KV 30 S</b>	<b>WAL373449</b>	150,3	62	49	35,5	41	50	
	400 (5801)	38	<b>P-KV 38 S</b>	<b>WAL373450</b>	205,1	72	57	41	50	60	

L<sub>2</sub> = approximate length with nut tightened  
L<sub>2</sub> = Ungefährmaß bei angezogener Überwurfmutter  
L<sub>2</sub> = longueur approximative, l'écrou étant bloqué