




# CADDY® SUPER FIX LF M8

## one piece pipe clip with M8 boss

- the special lining allows expansion or contraction of the pipe for plastic pipes
- easy to install locking mechanism
- EPDM rubber insulation for sound reduction compliant with DIN 4109
- Cylinder head screw M6 with combination head (slot & crosshead)
- Surface finish: electro zinc plated
- steel profile (B x S)
- for pipe diameter from 14-110 mm
- Temperature rating from -50°C up to +100°C
- fire rating B2 acc. to DIN 4102




N <sup>o</sup>	Ø "	d mm	B x S mm	Sc x L			kg/1
595050	3/8	14-16	20x1,5	M6x20	1000	100	0,05
595055	1/2	20-23	20x1,5	M6x20	1000	100	0,05
595060	3/4	25-28	20x1,5	M6x20	1000	100	0,06
595065	1	32-35	20x1,5	M6x20	1000	100	0,07
595070	1 1/4	40-43	20x1,5	M6x20	1000	50	0,08
595075		50-55	20x1,5	M6x20	1000	50	0,09
595080		63-67	20x1,5	M6x20	1300	50	0,10
595085		75	20x1,5	M6x25	1300	25	0,10
595090	3	90	20x2,0	M6x25	1300	25	0,11
595095		110	23x2,5	M6x25	1300	25	0,11

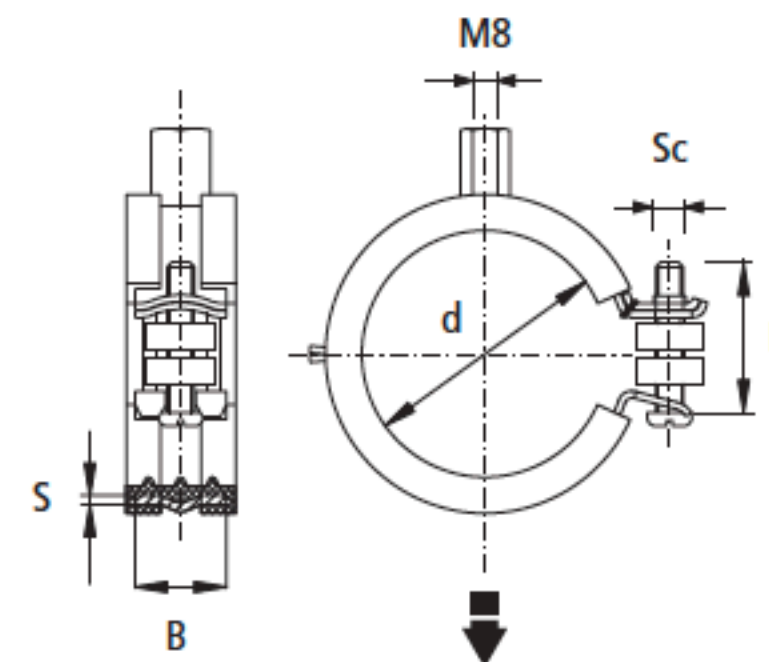

## strut pipe clamps

- Suits strut channels and cantilever arms CADDY® ERISTRUT and similar channels
- hex screw with slot
- to fix pipes and cables
- pipe diameter from 6 - 221 mm
- Surface finish: electro zinc plated



N <sup>o</sup>	Ø "	d mm		kg/1
598811		6-8	100	0,05
598812	1/8	8-11	100	0,05
598813		11-12	100	0,05
598814	3/8	15-17	100	0,06
598815		18-20	100	0,06
598816	1/2	21-23	100	0,06
598817		23-26	100	0,06
598818	3/4	26-29	100	0,06
598819		29-32	100	0,06
598822	1	32-36	50	0,07
598823		36-39	50	0,07
598824		39-42	50	0,07
598825	1 1/4	42-45	50	0,07
598826	1 1/2	46-50	50	0,08
598827		50-54	50	0,08
598828		52-56	50	0,11
598829		56-60	50	0,12
598831	2	60-63	50	0,13
598832		62-64	50	0,13
598833		64-67	50	0,13
598834		67-71	50	0,14
598835		71-74	25	0,16
598836	2 1/2	74-77	25	0,17
598837		77-80	25	0,20
598838		83-86	25	0,21
598839	3	86-90	25	0,23
598842		96-100	25	0,24
598843		100-103	25	0,24
598844		109-112	25	0,26
598845	4	112-115	25	0,28
598846		115-118	25	0,32
598847		125-128	25	0,38
598848		132-135	25	0,40
598849		135-138	25	0,42
598853	5	138-141	25	0,45
598854		148-151	25	0,45
598855		157-160	25	0,46
598856		160-164	25	0,62
598857		164-167	25	0,65
598858	6	167-170	25	0,69
598859		176-179	25	0,72
598862		179-182	25	0,76
598863		189-192	25	0,89
598864		196-200	25	0,92
598865	8	218-221	1	0,99

