


Ra
JIS

0.2
1.6
6.3
25
0.1
0.2
0.3
0.5
0.8

GENERAL TOLERANCE
0.5~5
6~30
31~120
121~320
321~1000

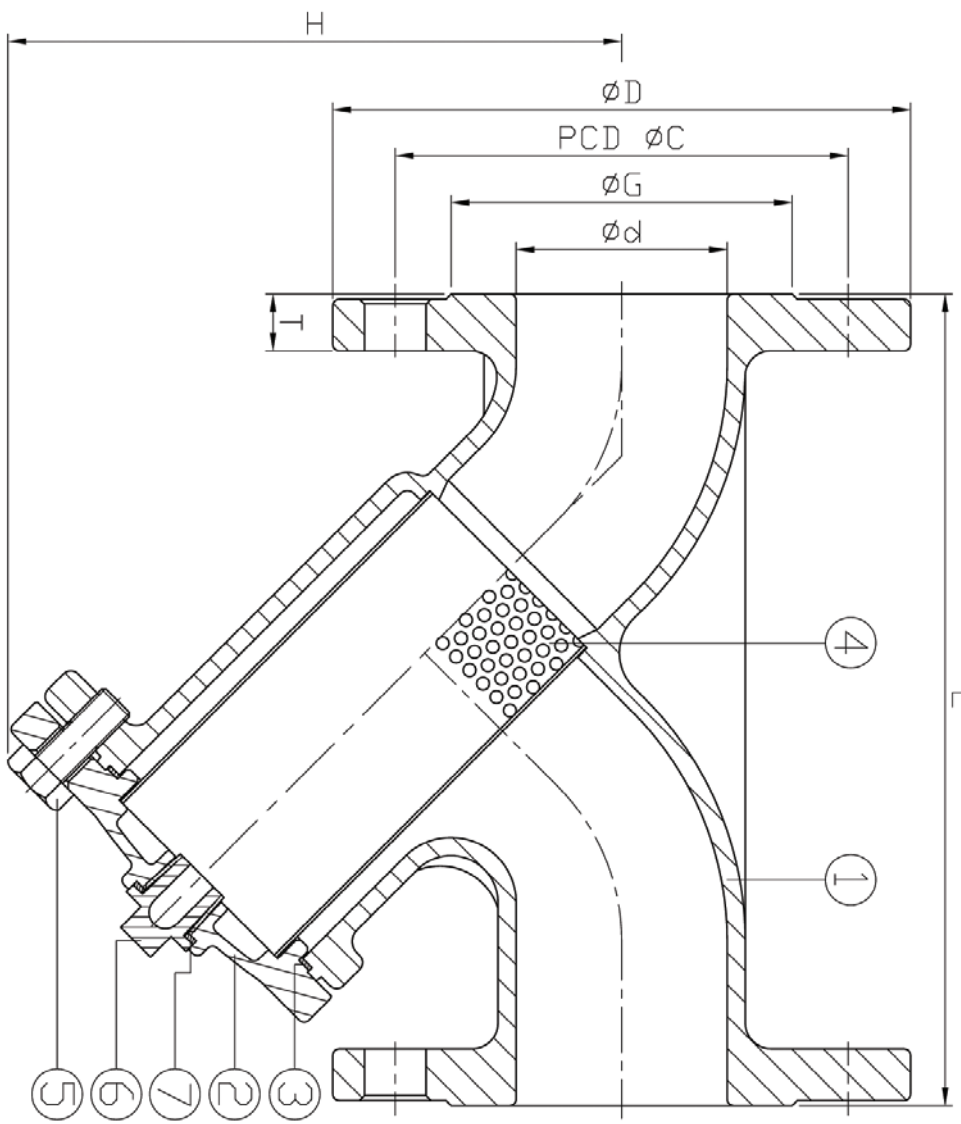

ITEM	PARTS	MATERIAL
1	BODY	ASTM A216-WCB
2	BONNET	SCS 13
3	GASKET	PTFE
4	SCREEN	SUS 304
5	BONNET BOLT	ASTM A193-B8
6	STOPPER	SUS 304
7	GASKET	PTFE

DN	d	L	H	D		C		G		T	
				10K	150	10K	150	10K	150	10K	150
15	15	120	75	95	89	70	60.5	52	35	12	11.1
20	20	140	75	100	98	75	70	58	43	14	11.1
25	25	150	100	125	108	90	79.5	70	51	14	11.1
40	40	190	120	140	127	105	98.5	85	73	16	14.3
50	50	210	140	155	152	120	120.5	100	92	16	15.9
65	65	250	175	175	178	140	139.5	120	105	18	17.5
80	80	280	196	185	190	150	152.5	130	127	18	19.1
100	100	340	244	210	229	175	190.5	155	157	18	23.9
125	125	380	277	250	254	210	216	185	186	20	23.9
150	150	420	320	280	279	240	241.5	215	216	22	25.4
200	200	500	390	330	343	290	298.5	265	270	22	28.6
250	250	730	508	400	406	355	362	325	324	24	30.2

NPS	d	L	H	D		C		G		T	
				10K	150	10K	150	10K	150	10K	150
1/2"	0.59	4.72	2.95	3.74	3.5	2.76	2.38	2.05	1.38	0.47	0.44
3/4"	0.79	5.51	2.95	3.94	3.86	2.95	2.76	2.28	1.69	0.55	0.44
1"	0.98	5.91	3.94	4.92	4.25	3.54	3.13	2.76	2.01	0.55	0.44
1-1/2"	1.57	7.48	4.72	5.51	5	4.13	3.88	3.35	2.87	0.63	0.56
2"	1.97	8.27	5.51	6.1	5.98	4.72	4.74	3.94	3.62	0.63	0.63
2-1/2"	2.56	9.84	6.89	6.89	7.01	5.51	5.49	4.72	4.13	0.71	0.69
3"	3.15	11.02	7.72	7.28	7.48	5.91	6	5.12	5	0.71	0.75
4"	3.94	13.39	9.61	8.27	9.02	6.89	7.5	6.1	6.18	0.71	0.94
5"	4.92	14.96	10.91	9.84	10	8.27	8.5	7.28	7.32	0.79	0.94
6"	5.91	16.54	12.6	11.02	10.98	9.45	9.51	8.46	8.5	0.87	1
8"	7.87	19.69	15.35	12.99	13.5	11.42	11.75	10.43	10.63	0.87	1.13
10"	9.84	28.74	20	15.75	15.98	13.98	14.25	12.8	12.76	0.94	1.19

unit:mm

CHECK BY	DRAWING BY	DATE	SPECIFICATION
		Jun.23.2008	Flange End Y-Strainer ANSI 150 / JIS 10K
			MATERIAL
			ASTM A216-WCB
			PROCESS/No.
			UNIT / SCALE
			mm

Revision	Description	Date	Approve
△			
△			
△			

DRAWING NO. **2049F003SL -08**