


# Pneumatic Cylinders

## Repair Kits to suit ISO15552

Part no.	Description	Material	Size	Temperature Range °C
KFRK-32	O-ring	TPU	Ø11.2*Ø21.2*10	90°
	Cushion O-ring	TPU	Ø15.5*Ø21.5*5.5	90°
	Piston Seal	TPU	Ø23.3*Ø32.3*3.4	85°
	2g lubricant			
KFRK-40	O-ring	TPU	Ø15.2*Ø28.4*10.7	90°
	Cushion O-ring	TPU	Ø19.4*Ø27.1*7.8	90°
	Piston Seal	TPU	Ø31.3*Ø40.35*3.4	85°
	2g lubricant			
KFRK-50	O-ring	TPU	Ø19.5*Ø32.6*10.7	90°
	Cushion O-ring	TPU	Ø27.4*Ø35.2*7.8	90°
	Piston Seal	TPU	Ø41.3*Ø50.35*3.4	85°
	2g lubricant			
KFRK-63	O-ring	TPU	Ø19.5*Ø32.6*10.7	90°
	Cushion O-ring	TPU	Ø27.4*Ø35.2*7.8	90°
	Piston Seal	TPU	Ø52.2*Ø63.4*4.4	85°
	2g lubricant			
KFRK-80	O-ring	TPU	Ø24.5*Ø38*11.2	90°
	Cushion O-ring	TPU	Ø35.2*Ø45*7.8	90°
	Piston Seal	TPU	Ø69.2*Ø80.4*4.4	85°
	2g lubricant			
KFRK-100	O-ring	TPU	Ø24.5*Ø38*11.2	90°
	Cushion O-ring	TPU	Ø35.2*Ø45*7.8	90°
	Piston Seal	TPU	Ø89.1*Ø100.5*4.4	85°
	2g lubricant			
KKSrk-50-V	Rod Seal - Viton	FR	Ø19.5*Ø27.5*4.6	90°
	Piston Seal - Viton	FR	Ø39.2*Ø50.1*3.6	90°
	O-ring	FR	Ø45.5*Ø49.5*4	85°
	2g lubricant			
KKSrk-63-V	Rod Seal - Viton	FR	Ø19.5*Ø27.5*4.6	90°
	Piston Seal - Viton	FR	Ø52.2*Ø63.1*3.6	90°
	O-ring	FR	Ø55.5*Ø59.5*4	85°
	2g lubricant			

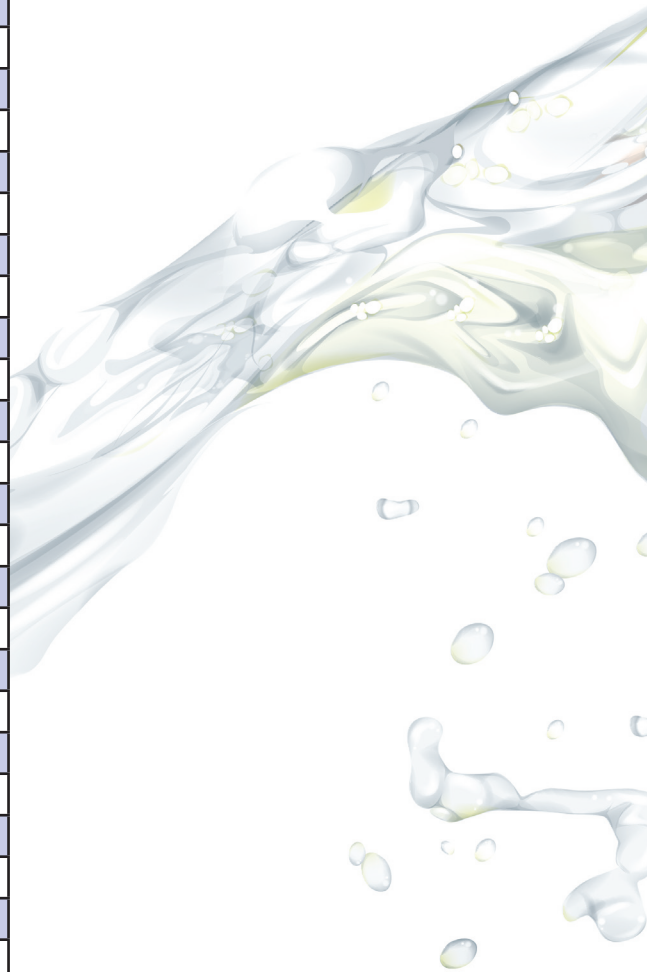

# Pneumatic Cylinders

## Repair Kits to suit ISO15552

Part no.	Description	Material	Size	Temperature Range °C
KKSrk-80-V	Rod Seal - Viton	FR	Ø24.5*Ø32.5*4.6	90°
	Piston Seal - Viton	FR	Ø64*Ø80.35*5.6	90°
	O-ring	FR	Ø74.5*Ø78.5*4	85°
	2g lubricant			
KKSrk-100-V	Rod Seal - Viton	FR	Ø31.5*Ø42.7*7.7	90°
	Piston Seal - Viton	FR	Ø84*Ø100.35*5.6	90°
	O-ring	FR	Ø94.5*Ø98.5*4	85°
	2g lubricant			
KFRK-125	O-ring	TPU	Ø31.4*Ø44.7*11.2	90°
	Cushion O-ring	TPU	Ø39.2*Ø49*7.8	90°
	Piston Seal	TPU	Ø104.5*Ø125.7*8.4	85°
	O-ring	NBR	Ø118*Ø125.1*3.55	75°
	2g lubricant			
KFRK-160	O-ring	TPU	Ø39.4*Ø52.7*11.2	90°
	Cushion O-ring	TPU	Ø49.2*Ø59.1*7.8	90°
	Piston Seal	TPU	Ø139.5*Ø160.8*8.4	85°
	O-ring	NBR	Ø150*Ø160.6*5.3	75°
	2g lubricant			
KFRK-200	O-ring	TPU	Ø39.4*Ø52.7*11.2	90°
	Cushion O-ring	TPU	Ø49.2*Ø59.1*7.8	90°
	Piston Seal	TPU	Ø179.5*Ø200.9*8.4	85°
	O-ring	NBR	Ø190*Ø200.6*5.3	75°
	2g lubricant			

