


Fittings Mod. 6560




DIMENSIONS					
Mod.	A	C	F	L	M
6560 4	4	5	18	33	9
6560 6	6	7	24,5	39	12,5
6560 8	8	9	28,5	44	14,5
6560 10	10	15,5	32	53,5	16

Cartridge Mod. 6700




S* = Metallic seat (+ 0.05 - 0)
 S* = Synthetic seat (+ 0.03 - 0,02).

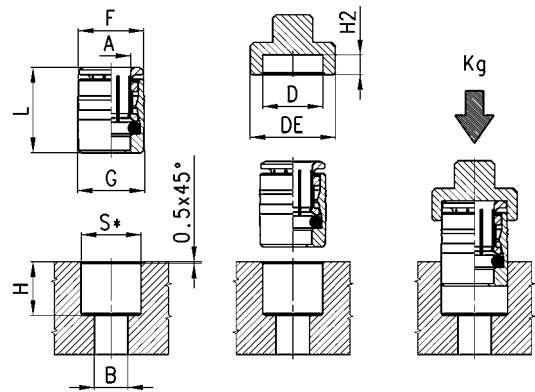


DIMENSIONS													
Mod.	A	B	D	DE	F	G	H	H2	L	M	S	Kg min	Kg max
6700 4	4	3,5	8,8	14	8,6	9	11	3,1	14,5	4	8,75	314	439
6700 5	5	3,5	9,8	15	9,6	10	11,5	3,1	15,5	5	9,75	251	439
6700 6	6	4	12	17	11,8	12,2	12	3,6	16,5	6	11,95	314	533
6700 8	8	6	14	19	13,8	14,2	14	3,1	18	8	13,95	345	471
6700 10	10	8	16	21	15,8	16,2	16,5	3,1	20,5	10	15,95	439	485

Closed pushing fittings Mod. 6750



DIMENSIONS			
Mod.	A	G	L
6750 4	4	8,8	15
6750 6	6	11,8	17
6750 8	8	13,8	18,5
6750 10	10	15,8	21
6750 12	12	17,8	20

Fittings Mod. 6850

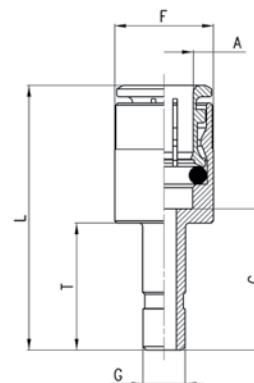

DIMENSIONS						
Mod.	A	G	C	F	L	T
6850 6-4	6	4	17,5	12,7	33,5	16,5
6850 8-6	8	6	19	14	36,5	18