

Wall or Ceiling Mounted Pipe Clips




Product Data Sheet (2017-10-13)

BRS-A Clips - Stainless Steel

Stainless steel universal clips with rubber strips for mounting pipes to the wall or ceiling.

For use in situations where stainless steel mounting material is desired or required, such as food processing, facilities, laboratories, the chemical industry, etc.

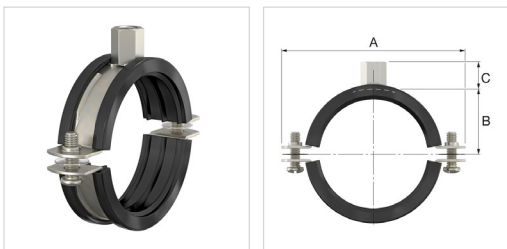

Type	Ø Pipe		Connection	Strip dimensions [mm]	Max. working load [N]	Dimensions			###	Order Code
	Nom. ["]	Ext. dia. [mm]				A [mm]	B [mm]	C [mm]		
BRS-A 8 - 10 SST	1/8"	8 - 10	M 8/10	20 x 1.5	1000	53	13	16	50	38450
BRS-A 12 - 14 SST	1/4"	12 - 14	M 8/10	20 x 1.5	1000	58	15	16	50	38451
BRS-A 15 - 19 SST	3/8"	15 - 19	M 8/10	20 x 1.5	1000	62	18	16	50	38452
BRS-A 20 - 25 SST	1/2"	20 - 25	M 8/10	20 x 1.5	1000	69	21	16	50	38453
BRS-A 26 - 30 SST	3/4"	26 - 30	M 8/10	20 x 1.5	1000	74	23	16	50	38454
BRS-A 32 - 36 SST	1"	32 - 36	M 8/10	20 x 1.5	1000	81	26	16	50	38455
BRS-A 38 - 43 SST	1 1/4"	38 - 43	M 8/10	20 x 1.5	1000	87	30	16	50	38456
BRS-A 44 - 49 SST	1 1/2"	44 - 49	M 8/10	20 x 1.5	1000	94	33	16	50	38457
BRS-A 50 - 55 SST	1 3/4"	50 - 55	M 8/10	20 x 1.5	1000	103	36	16	50	38458
BRS-A 56 - 61 SST	2"	56 - 61	M 8/10	20 x 1.5	1000	106	39	16	50	38459
BRS-A 62 - 67 SST		62 - 67	M 8/10	20 x 2.0	1300	113	42	16	50	38460
BRS-A 68 - 73 SST	2 1/4"	67 - 73	M 8/10	20 x 2.0	1300	123	45	16	50	38461
BRS-A 75 - 80 SST	2 1/2"	75 - 80	M 8/10	20 x 2.0	1300	128	48	16	50	38462
BRS-A 82 - 86 SST	2 3/4"	82 - 86	M 8/10	20 x 2.0	1300	134	51	16	50	38463
BRS-A 87 - 92 SST	3"	87 - 92	M 8/10	20 x 2.0	1300	141	54	16	50	38464

Type	Ø Pipe		Connection	Strip dimensions [mm]	Max. working load [N]	Dimensions			###	Order Code
	Nom. ["]	Ext. dia. [mm]				A [mm]	B [mm]	C [mm]		
BRS-A 95 - 102 SST	3 1/2"	95 - 102	M 8/10	20 x 2.5	2150	158	58	16	50	38465
BRS-A 108 - 116 SST	4"	108 - 116	M 8/10	20 x 2.5	2150	170	65	16	25	38466
BRS-A 121 - 127 SST		121 - 127	M 8/10	20 x 2.5	2150	185	70	16	25	38467
BRS-A 131 - 141 SST	5"	131 - 141	M 8/10	20 x 2.5	2150	195	77	16	25	38468
BRS-A 159 - 163 SST		159 - 163	M 8/10	20 x 2.5	2150	215	88	16	25	38469
BRS-A 165 - 169 SST	6"	165 - 169	M 8/10	20 x 2.5	2150	226	91	16	25	38470
BRS-A 192 - 202 SST		192 - 202	M 8/10	20 x 3.0	2150	265	107	16	25	38471
BRS-A 210 - 220 SST	8"	210 - 220	M 8/10	20 x 3.0	2150	274	117	16	25	38473

Advantages

- Suitable for short-distance mounting.

Technical information

- Stainless steel AISI 316 (1.4401 according to EN 10088).
 - Noise-suppressing rubber strip: 17 dB(A) according to ISO 3822-1.
- To achieve maximum sound suppression do not overload the fitting.
- Safety margin for minimal breaking load (V) = 3.
 - Connection: M 8/10.