


FLOW INDICATOR

LV1304 FLOW INDICATOR

PN16, screwed BSP female

Visual control apparatus with hardened single-glass inspection window with movable ball in Moplen resistant to 150°C

Dimensions				
DN	3/8	1/2	3/4	1
L	98	95	101	106
H	60	60	65	75
S	40	40	40	40

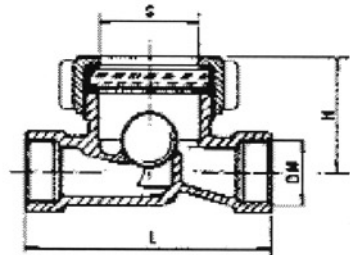


LV1303 FLOW INDICATOR

PN16, screwed BSP female

Visual control apparatus with hardened single-glass inspection window with fixed vanes

Dimensions								
DN	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2
L	98	95	101	106	130	137	164	180
S	39	39	44	44	50	50	63	82

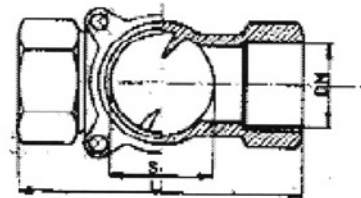

LV1306 FLOW INDICATOR

PN16, screwed BSP female

Visual control apparatus with hardened double-glass inspection window with movable ball in Moplen resistant to 150°C

Dimensions				
DN	3/8	1/2	3/4	1
L	98	95	100	105
S	40	40	44	44

