

88 Series High Pressure Screw-To-Connect Coupling, 10000PSI (Carbon Steel) Ball Valve, ISO 14540

Applications: This Series couplings with their threaded union locking system and precision ball-type check valves, are designed for extreme high pressure applications such as found on portable hydraulic rams.

This series of couplings with their threaded union locking system and precision ball-type check valves, are designed for extreme high pressure applications such as found on portable hydraulic rams.


Other seals available on request

Working Temperature:
-20°C to +100°C

Maximum Working Pressure:
720 bar


Coupling with Nitrile Seals, NPTF

Part Code	Size	Body Size	LS	D	HS	T
HFSFC8814	04	1/4"	60.5	30	S22	1/4"NPTF
HFSFC8838	06	3/8"	71.5	36	S24	3/8"NPTF

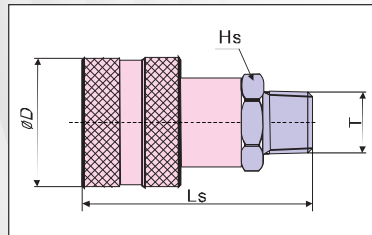


Plug with Nitrile Seals, NPTF

Part Code	Size	Body Size	LP	E	HP	T
HFSFP8814	04	1/4"	39	1-18UNS	S19	1/4"NPTF
HFSFP8838	06	3/8"	40	1-3/16-16UN	S32	3/8"NPTF

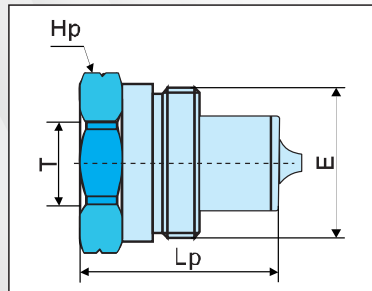


88 Series Aluminium Dust Covers

Part Code (Plug)	Size	ISO	Part code (Cap)
HFSFC-14-DP	04	6.3	HFSFP-14-DC
HFSFC-38-DP	06	10	HFSFP-38-DC

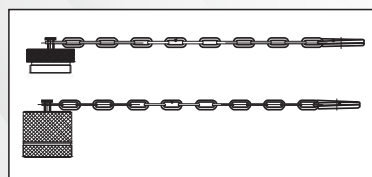

Performance:

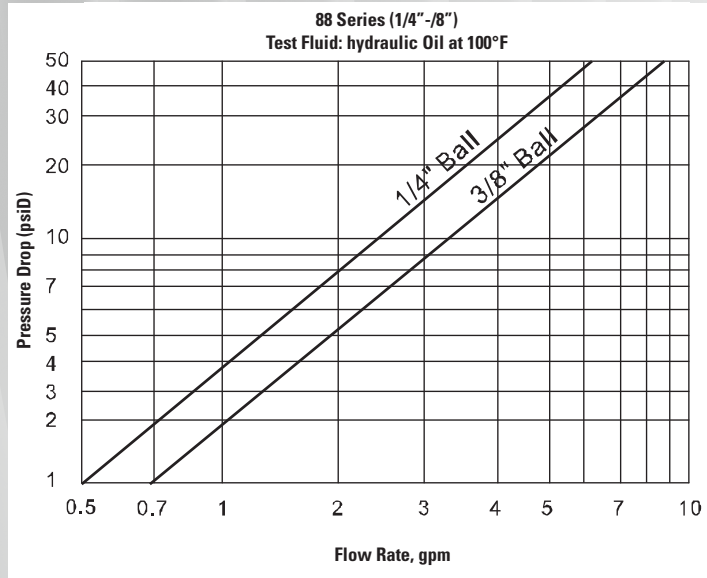

Interchange:

Hansen WA56000 Series, Parker 3000 Series, Safeway S30 Series, Faster PVVM Series, Stucchi IV-HP Series, DNP PVS Series, Dixon T Series, Holmbury PSB Series

Material:

Coupler Body: STEEL, TRIVALENT PLATED
Valve: STEEL, BALL TYPE
Springs: C98
Locking O-Ring: C98
Balls: GCr15
Seals: Buna-N(Nitrile)
Back-Up Ring: PTFE
Surface treatment: Zinc plating and Cr 3+ Passivation

Accessories

Dust caps and dust plugs in Aluminium.

Attention:

Only plug and socket with the same thread fit together.



Temperature Range:

-20°C to +100°C/-4°F to +212°F
With standard seals: Buna-N(Nitrile)
On request seals: Viton, Neoprene, EPDM or other seals.



Maximum Working Pressure:

10440PSI(720bar)