

Thermoplastic Sewer Jetting Hose 2,500 PSI

Thermoplastic Sewer Jetting Hose 175 bar

Application:

Standard Sewer Cleaning vehicles and cleaning equipment. Special construction for optimum cut and wear resistance. Bonded tube and cover. Available in long lengths with a special cover resistant to microbiological degradation. Lightweight compared to conventional rubber alternatives and increased lifetime.

Application Standards:

Exitflex QD-M

Construction:

Core: Thermoplastic Elastomer

Reinforcement: 1 or 2 braids of synthetic fibre

Cover: Orange colour - polyurethane.


Other lengths and pressure ratings are available on request.



Temperature Standards:
-40°C to +60°C



Maximum Working Pressure:
175 bar

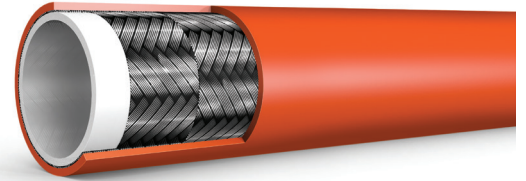

Hose Type	Size		Hose I.D. (Nom.)		Hose O.D. (Nom.)		Working Pressure		Min. Burst Pressure		Min. Bend Radius	
	Ref. Nr.	Dash Size	DN	in inch	in mm	in inch	in mm	in psi	in bar	in psi	in bar	in mm
EF301-3	3	5	3/16	4.8	0.405	10.3	2.500	175	6.250	438	40	1.6
EF301-4	4	6	1/4	6.4	0.490	12.4	2.500	175	6.250	438	40	1.6
EF301-8	8	12	1/2	12.7	0.810	20.6	2.500	175	6.250	438	100	4.0
EF301-12	12	20	3/4	19.1	1.150	29.2	2.500	175	6.250	438	125	5.0
EF301-16	16	24	1	25.4	1.450	36.8	2.500	175	6.250	438	160	6.4
EF301-20	20	32	1.1/4	32.0	1.800	45.7	2.500	175	6.250	438	250	10.0