



50-5404 - (5404)

NPTF Male x NPTF Male



BRENNAN INDUSTRIES, EXTRAORDINARY FITTINGS

In business for over 60 years, Brennan supplies more than 50,000 types of hydraulic fittings and adaptors in sizes ranging from 1/16 to 3 inches.


Learn More at Brennan University:

[Fittings 101](#)

[Tube Fittings Resources](#)

[Literature and Certifications](#)

Tech Data Sheet: 71449

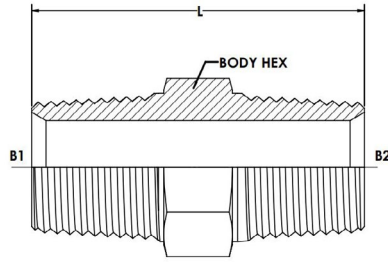

50-5404 - (5404)

DESCRIPTION:

NPTF MALE X NPTF MALE

UK PART NUMBER:

50-5404

US PART NUMBER:

5404

| Item | A1 NPTF | A2 NPTF | A1 DRILL | A2 DRILL | L LGTH | C HEX | Material |
|---------------|--------------|--------------|----------|----------|--------|-------|----------|
| 50-5404-02-01 | 1/16-27 | 1/8-27 | 0.188 | 0.109 | 1.060 | 0.438 | STEEL |
| 50-5404-02-02 | 1/8-27 | 1/8-27 | 0.188 | 0.188 | 1.060 | 0.438 | STEEL |
| 50-5404-04-02 | 1/4-18 | 1/8-27 | 0.281 | 0.188 | 1.260 | 0.625 | STEEL |
| 50-5404-04-04 | 1/4-18 | 1/4-18 | 0.281 | 0.281 | 1.450 | 0.625 | STEEL |
| 50-5404-06-02 | 3/8-18 | 1/8-27 | 0.406 | 0.188 | 1.260 | 0.750 | STEEL |
| 50-5404-06-04 | 3/8-18 | 1/4-18 | 0.406 | 0.281 | 1.450 | 0.750 | STEEL |
| 50-5404-06-06 | 3/8-18 | 3/8-18 | 0.406 | 0.406 | 1.450 | 0.750 | STEEL |
| 50-5404-08-02 | 1/2-14 | 1/8-27 | 0.531 | 0.281 | 1.470 | 0.875 | STEEL |
| 50-5404-08-04 | 1/2-14 | 1/4-18 | 0.531 | 0.281 | 1.700 | 0.875 | STEEL |
| 50-5404-08-06 | 1/2-14 | 3/8-18 | 0.531 | 0.406 | 1.700 | 0.875 | STEEL |
| 50-5404-08-08 | 1/2-14 | 1/2-14 | 0.531 | 0.531 | 1.890 | 0.875 | STEEL |
| 50-5404-12-04 | 3/4-14 | 1/4-18 | 0.719 | 0.281 | 1.770 | 1.125 | STEEL |
| 50-5404-12-06 | 3/4-14 | 3/8-18 | 0.719 | 0.406 | 1.770 | 1.125 | STEEL |
| 50-5404-12-08 | 3/4-14 | 1/2-14 | 0.719 | 0.531 | 1.960 | 1.125 | STEEL |
| 50-5404-12-12 | 3/4-14 | 3/4-14 | 0.719 | 0.719 | 1.960 | 1.125 | STEEL |
| 50-5404-16-04 | 1-11-1/2 | 1/4-18 | 0.938 | 0.281 | 1.960 | 1.375 | STEEL |
| 50-5404-16-06 | 1-11-1/2 | 3/8-18 | 0.938 | 0.406 | 1.960 | 1.375 | STEEL |
| 50-5404-16-08 | 1-11-1/2 | 1/2-14 | 0.938 | 0.531 | 2.090 | 1.375 | STEEL |
| 50-5404-16-12 | 1-11-1/2 | 3/4-14 | 0.938 | 0.719 | 2.150 | 1.375 | STEEL |
| 50-5404-16-16 | 1-11-1/2 | 1-11-1/2 | 0.938 | 0.938 | 2.340 | 1.375 | STEEL |
| 50-5404-20-12 | 1-1/4-11-1/2 | 3/4-14 | 1.250 | 0.719 | 2.260 | 1.750 | STEEL |
| 50-5404-20-16 | 1-1/4-11-1/2 | 1-11-1/2 | 1.250 | 0.938 | 2.450 | 1.750 | STEEL |
| 50-5404-20-20 | 1-1/4-11-1/2 | 1-1/4-11-1/2 | 1.250 | 1.250 | 2.480 | 1.750 | STEEL |
| 50-5404-24-12 | 1-1/2-11-1/2 | 3/4-14 | 1.500 | 0.719 | 2.380 | 2.000 | STEEL |
| 50-5404-24-16 | 1-1/2-11-1/2 | 1-11-1/2 | 1.500 | 0.938 | 2.550 | 2.000 | STEEL |
| 50-5404-24-20 | 1-1/2-11-1/2 | 1-1/4-11-1/2 | 1.500 | 1.250 | 2.610 | 2.000 | STEEL |
| 50-5404-24-24 | 1-1/2-11-1/2 | 1-1/2-11-1/2 | 1.500 | 1.500 | 2.610 | 2.000 | STEEL |
| 50-5404-32-12 | 2-11-1/2 | 3/4-14 | 1.938 | 0.719 | 2.540 | 2.500 | STEEL |
| 50-5404-32-16 | 2-11-1/2 | 1-11-1/2 | 1.938 | 0.938 | 2.630 | 2.500 | STEEL |
| 50-5404-32-20 | 2-11-1/2 | 1-1/4-11-1/2 | 1.938 | 1.250 | 2.760 | 2.500 | STEEL |
| 50-5404-32-24 | 2-11-1/2 | 1-1/2-11-1/2 | 1.938 | 1.500 | 2.790 | 2.500 | STEEL |
| 50-5404-32-32 | 2-11-1/2 | 2-11-1/2 | 1.938 | 1.938 | 2.820 | 2.500 | STEEL |
| 50-5404-40-40 | 2 1/2-8 | 2 1/2-8 | 2.318 | 2.318 | 3.950 | 3.000 | STEEL |