




OR-9070 - (FS6804-NW0-FG)

Male Tee Positional on Run with O-Ring

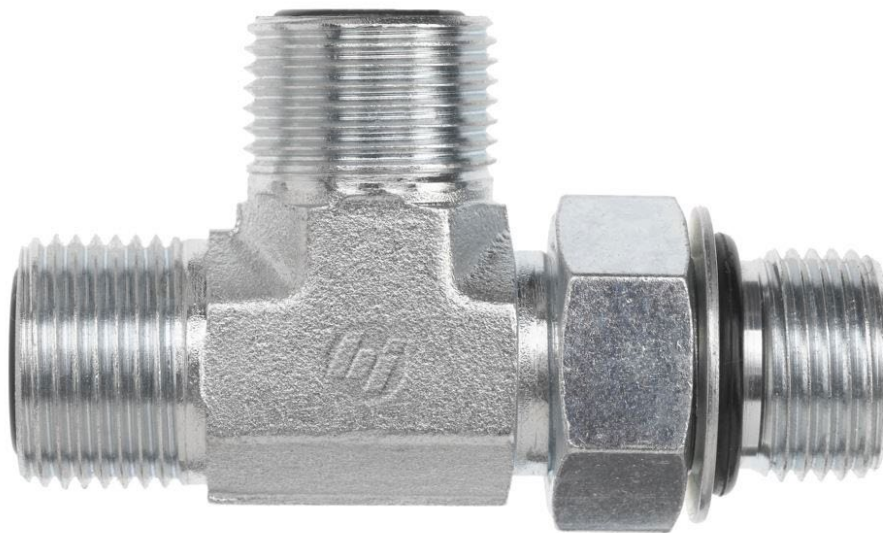

BRENNAN INDUSTRIES, EXTRAORDINARY FITTINGS

In business for over 60 years, Brennan supplies more than 50,000 types of hydraulic fittings and adaptors in sizes ranging from 1/16 to 3 inches.

Learn More at Brennan University:


[Fittings 101](#)

[Tube Fittings Resources](#)

[Literature and Certifications](#)

Tech Data Sheet: 71374

OR-9070 - (FS6804-NWO-FG)

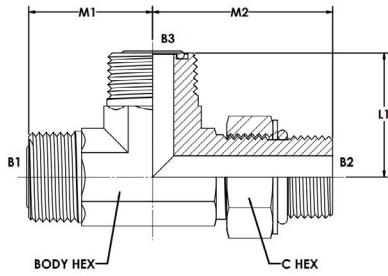

DESCRIPTION:

MALE TEE POSITIONAL ON RUN WITH
O-RING

UK PART NUMBER:

OR-9070

US PART NUMBER:

FS6804-NWO-FG

Item	TUBE O.D.	A1 THREAD	B THREAD	A2 THREAD	A1 DRILL	B DRILL	A2 DRILL	M1 LGTH	N LGTH	M2 LGTH	C HEX
OR-9070-04-04-04	1/4	9/16-18	7/16-20	9/16-18	0.172	0.172	0.172	0.85	1.29	0.85	0.625
OR-9070-04-06-04	1/4	9/16-18	9/16-18	9/16-18	0.172	0.264	0.172	0.92	1.45	0.92	0.75
OR-9070-04-08-04	1/4	9/16-18	3/4-16	9/16-18	0.172	0.378	0.172	0.980	1.600	0.980	0.75
OR-9070-06-04-06	3/8	11/16-16	7/16-20	11/16-16	0.172	0.172	0.264	0.980	1.370	0.980	0.625
OR-9070-06-06-06	3/8	11/16-16	9/16-18	11/16-16	0.264	0.264	0.264	0.980	1.450	0.980	0.75
OR-9070-06-08-06	3/8	11/16-16	3/4-16	11/16-16	0.264	0.378	0.264	1.040	1.600	1.040	0.938
OR-9070-08-06-08	1/2	13/16-16	9/16-18	13/16-16	0.378	0.264	0.378	1.100	1.440	1.100	0.75
OR-9070-08-08-04	1/2	13/16-16	3/4-16	9/16-18	0.378	0.378	0.172	1.10	1.60	0.97	0.938
OR-9070-08-08-08	1/2	13/16-16	3/4-16	13/16-16	0.378	0.378	0.378	1.100	1.600	1.100	0.938
OR-9070-08-10-08	1/2	13/16-16	7/8-14	13/16-16	0.378	0.484	0.378	1.210	1.970	1.210	1.062
OR-9070-08-12-08	1/2	13/16-16	1-1/16-12	13/16-16	0.378	0.609	0.378	1.320	2.170	1.320	1.375
OR-9070-10-10-06	5/8	1-14	7/8-14	11/16-16	0.484	0.484	0.264	1.310	1.970	1.150	1.062
OR-9070-10-10-10	5/8	1-14	7/8-14	1-14	0.484	0.484	0.484	1.310	1.970	1.310	1.062
OR-9070-10-12-10	5/8	1-14	1-1/16-12	1-14	0.484	0.484	0.484	1.41	2.17	1.41	1.375
OR-9070-12-08-12	3/4	1-3/16-12	3/4-16	1-3/16-12	0.378	0.378	0.609	1.47	1.84	1.47	0.938
OR-9070-12-12-08	3/4	1-3/16-12	1-1/16-12	13/16-16	0.609	0.609	0.378	1.470	2.170	1.320	1.375
OR-9070-12-12-12	3/4	1-3/16-12	1-1/16-12	1-3/16-12	0.609	0.609	0.609	1.47	2.17	1.47	1.375
OR-9070-12-12-16	3/4	1-3/16-12	1-1/16-12	1-7/16-12	0.609	0.609	0.811	1.62	2.32	1.64	1.375
OR-9070-12-16-12	3/4	1-3/16-12	1-5/16-12	1-3/16-12	0.609	0.811	0.609	1.620	2.350	1.620	1.625
OR-9070-16-12-16	1	1-7/16-12	1-1/16-12	1-7/16-12	0.811	0.609	0.811	1.640	2.320	1.640	1.375
OR-9070-16-16-16	1	1-7/16-12	1-5/16-12	1-7/16-12	0.811	0.811	0.811	1.640	2.350	1.640	1.625
OR-9070-20-20-20	1-1/4	1-11/16-12	1-5/8-12	1-11/16-12	1.024	1.024	1.024	1.760	2.450	1.760	1.875
OR-9070-24-24-24	1 1/2	2-12	1-7/8-12	2-12	1.260	1.260	1.260	1.920	2.590	1.920	2.125