



37-4060 - (7001-ORR)

Metric Male x JIC Male 37 Deg Cone



BRENNAN INDUSTRIES, EXTRAORDINARY FITTINGS

In business for over 60 years, Brennan supplies more than 50,000 types of hydraulic fittings and adaptors in sizes ranging from 1/16 to 3 inches.

Learn More at Brennan University:

[Fittings 101](#)

[Tube Fittings Resources](#)

[Literature and Certifications](#)

Tech Data Sheet: 71383

37-4060 - (7001-ORR)



DESCRIPTION:

Metric Male x JIC Male 37 Deg Cone

UK SERIES:

37-4060

US SERIES:

7001-ORR

THREAD TYPE B1:

MALE JIC SAE 37 DEGREE FLARE

THREAD SPECIFICATION B1:

SAE J514

THREAD TYPE B2:


MALE METRIC O-RING & RET RING

THREAD SPECIFICATION B2:

FOR ISO 9974 PORT

BODY MATERIAL:

STEEL

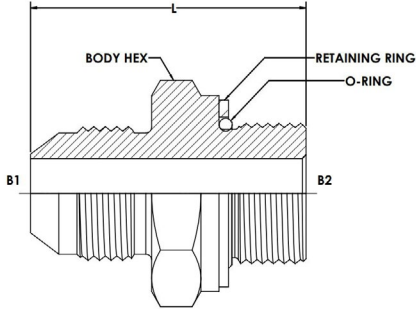

Item	THREAD SIZE B1	THREAD DRILL B1 (MM)	THREAD SIZE B2	THREAD DRILL B2 (MM)
37-4060-04-08	7/16-20	4.37	M08X1.0	2.01
37-4060-04-10	7/16-20	4.4	M10X1.0	4.4
37-4060-04-12	7/16-20	4.37	M12X1.5	4.37
37-4060-04-14	7/16-20	4.37	M14X1.5	7.5
37-4060-04-16	7/16-20	4.37	M16X1.5	7.54
37-4060-05-12	1/2-20	6.0	M12X1.5	6.0
37-4060-05-14	1/2-20	6.0	M14X1.5	6.0
37-4060-05-16	1/2-20		M16X1.5	
37-4060-06-10	9/16-18	7.5	M10X1.0	4.4
37-4060-06-10X1.5	9/16-18	7.54	M10X1.5	4.4
37-4060-06-12	9/16-18	7.5	M12X1.5	6.1
37-4060-06-12X1	9/16-18	7.5	M12X1.0	6.1
37-4060-06-14	9/16-18	7.5	M14X1.5	7.5
37-4060-06-16	9/16-18	7.54	M16X1.5	7.54
37-4060-06-18	9/16-18	7.0	M18X1.5	9.0
37-4060-06-20	9/16-18	7.0	M20X1.5	9.6
37-4060-06-22	9/16-18	7.0	M22X1.5	12.0
37-4060-08-12	3/4-16	9.93	M12X1.5	6.1
37-4060-08-14	3/4-16	9.9	M14X1.5	7.5
37-4060-08-16	3/4-16	8.0	M16X1.5	8.0
37-4060-08-18	3/4-16	9.93	M18X1.5	9.93
37-4060-08-20	3/4-16	9.6	M20X1.5	9.6
37-4060-08-22	3/4-16	9.93	M22X1.5	14.0
37-4060-08-24	3/4-16	9.93	M24X1.5	14.0
37-4060-10-16	7/8-14	12.3	M16X1.5	8.0
37-4060-10-18	7/8-14	12.3	M18X1.5	9.0
37-4060-10-20	7/8-14	11.0	M20X1.5	11.0
37-4060-10-22	7/8-14	12.0	M22X1.5	12.0
37-4060-10-24	7/8-14	12.3	M24X1.5	16.0
37-4060-10-27	7/8-14	12.3	M27X2.0	16.0
37-4060-12-16	1-1/16-12	15.5	M16X1.5	8.0
37-4060-12-22	1-1/16-12	15.5	M22X1.5	14.0
37-4060-12-24	1-1/16-12	15.47	M24X1.5	18.0
37-4060-12-26	1-1/16-12	15.3	M26X1.5	17.5
37-4060-12-27	1-1/16-12	15.5	M27X2.0	15.5
37-4060-12-30	1-1/16-12	15.5	M30X2.0	15.5
37-4060-12-33	1-1/16-12		M33X2.0	
37-4060-16-26	1-5/16-12	15.3	M26X1.5	17.5
37-4060-16-27	1-5/16-12	21.4	M27X2.0	16.0
37-4060-16-33	1-5/16-12	21.44	M33X2.0	23.0
37-4060-20-33	1-5/8-12		M33X2.0	
37-4060-20-42	1-5/8-12	27.4	M42X2.0	27.4
37-4060-24-42	1-7/8-12	33.3	M42X2.0	30.0
37-4060-24-48	1-7/8-12	33.3	M48X2.0	33.3