



QUALITY & EXPERIENCE

AMFEC MODEL 2-3K-2 COLUMN LOADER



Stationary model



Portable model

STANDARD FEATURES:

- 2" diameter heavy-duty screw
- 3 H.P. brake motor
- 1,000lb lifting capacity
- Heavy-duty "lift yoke" with safety nut
- 2 x 3" diameter guide posts
- 3/16" thick column body

- Tapered loading track to assist cart positioning
- Right or left hand execution
- Standard discharge height up to 84" (using standard carts)
- 9'6" overall height (custom heights available)

OPTIONS INCLUDE:

- Portable base frames
- Extra tall units available (capable of 14' discharge)
- Custom discharge chutes
- Side loading
- Roller bed lift carriage
- Severe duty units also available for bakery industry


AMERICAN FOOD EQUIPMENT COMPANY

21040 Forbes Street, Hayward, California 94545 • Phone (510) 783-0255 • www.amfec.com

STANDARD FEATURES



2" Diameter Heavy-Duty Screw with
Safety Nut

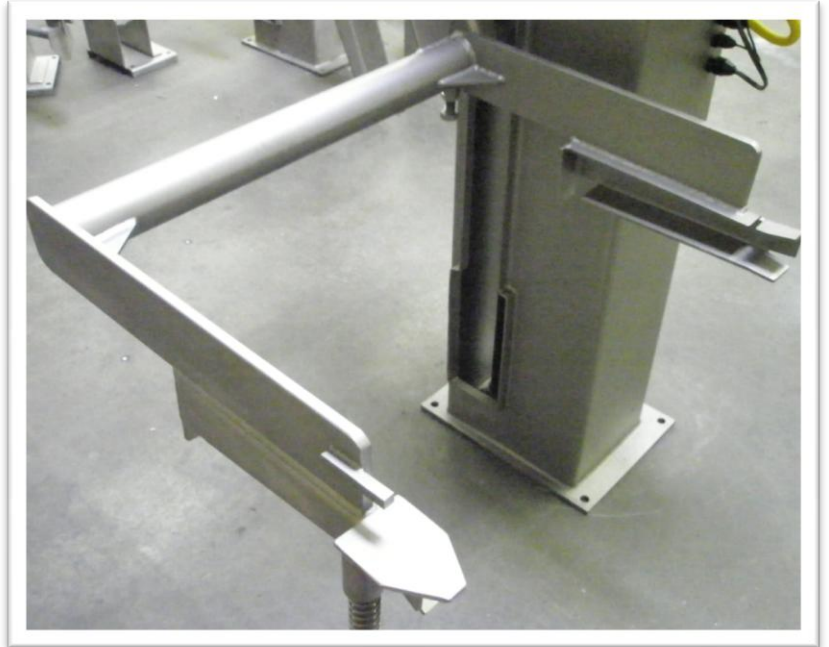

Tapered Loading Track and spring-loaded cart lock



Stainless Steel carriage arm –
connects to loader by sliding over
hardened CRS machined shaft



3/16" Thick Column Body – 304
Stainless Steel