




UNITED BAKERY EQUIPMENT CO.  
Engineering Excellence Since 1966

# MODEL 90-75

## Band Slicer

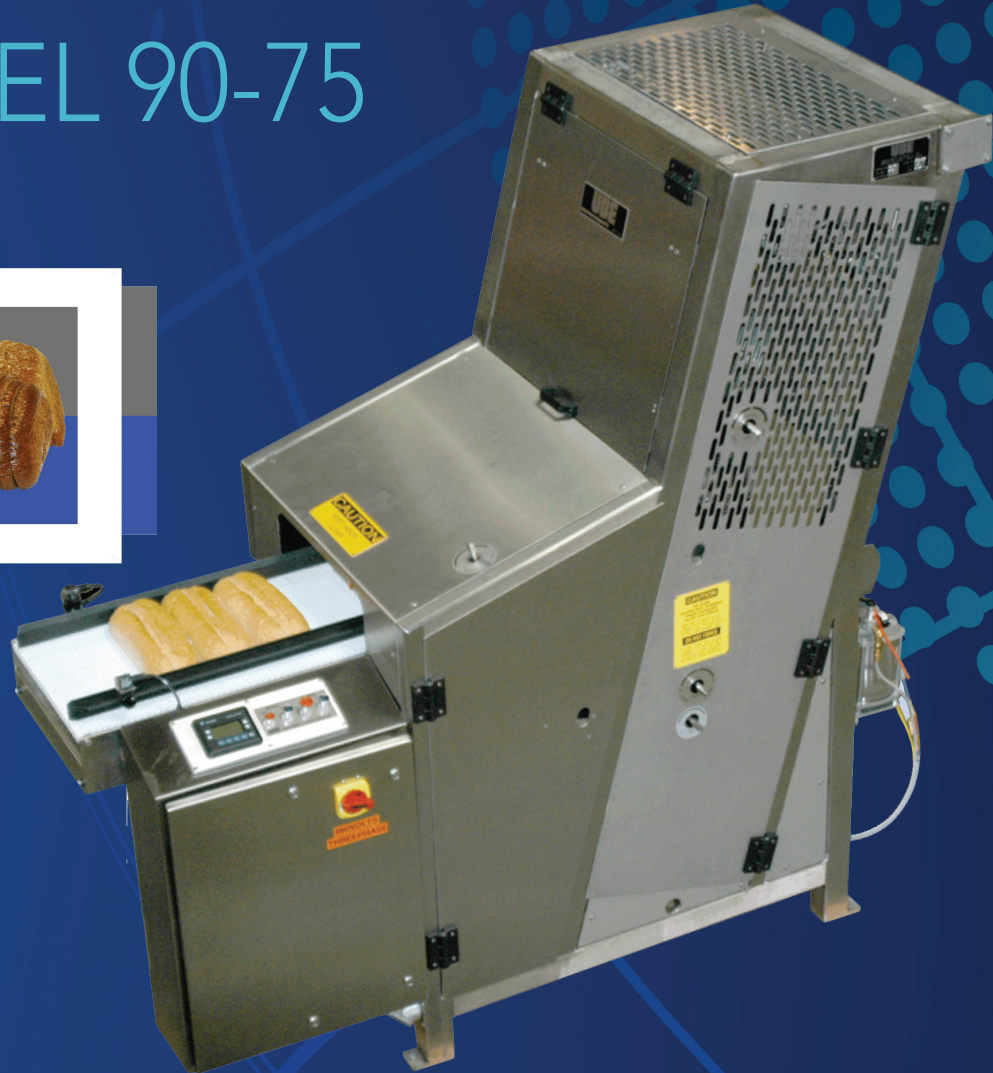

## UBE Model 90-75 Band Slicer

The UBE Model 90-75 Band Slicer combines years of step by step improvements into a servo driven reciprocating bagger with fewer moving parts and increasing reliability at high speed.

- ROI: UBE original engineered quality OEM Parts. Engineered from the ground up to maximize ROI.
- Providing innovative quality solutions to your slicing and bagging needs since 1966.
- We are experts with the next generation of PLC motion control.
- See the future of slicers and baggers from the industry leader.
- Our new machines have a more simplified design to increase reliability and ease of operation, as well as reduce maintenance and improve sanitation.



UNITED BAKERY EQUIPMENT CO.  
Engineering Excellence Since 1966

## Specifications

Specifications vary by product and application. Please contact our sales office about product varieties and speeds.

**Slicing speed**  
Up to 90 loaves per min.

**Blade length**  
176" or 184". [4.47m - 4.49m]

**Blade speed**  
1020 ft./min. [25.9m/min.]

**Minimum loaf size**  
6"L x 2"H x 3"W; [152mm x 51mm x 76mm]

**Maximum loaf size**  
16"L x 6"H x 10"W; [432mm x 152mm x 254mm]

**Adjusting unit range/standard**  
3/8" to 5/8"; [9.5mm to 15.9mm]

**Electrical**  
230/380/460 Volt, 50/60 Hz.,  
3 Ph., 5 HP

United Bakery Equipment  
Sales and Manufacturing  
19216 S. Laurel Park Road  
Rancho Domingez, CA 90220  
Tel: 310.635.8121  
Fax: 310.635.8171  
sales@ubeusa.com  
parts@ubeusa.com

[www.ubeusa.com](http://www.ubeusa.com)

© United Bakery Equipment, Inc. 2019



Proudly  
manufactured  
in the USA

UBE builds the Model 90-75 Band Slicer for each customer's particular needs. Over 1000 installations required numerous customer driven innovations. Your machine may vary from this typical unit illustrated. UBE wants to meet with you and design your new line.

## Features

- Stainless steel frame features paint free construction and easy access guarding
- Painted electrical enclosure IP65 (Nema 12) rated
- Category 3 Safety Compliant with Dual Channel Switches, Safety Relay, and VFD
- Slice thickness adjusting mechanism easily removed for wash-down cleaning
- Blade guides are offset to eliminate build up
- Single point infeed and outfeed rail adjustments
- Automatic broken blade shut-off
- Pneumatic double loaf eliminator clutch outfeed
- Last loaf ejector
- Drum Scrapers
- Choice of frame handing (right or left hand blades and controls)
- Hook-up to any standard packaging machine
- Connects to all baggers and wrappers - BISSC approved

## Options

- Stainless steel electrical enclosure IP66-(Nema 4) rated
- Automatic blade honing with timer and ceramic stones
- Blade oiling system, eliminates heat and gluten buildup
- Special slice thickness ranges from 1/4" to 5/8" or 3/8" to 1"
- Heel remover
- Extra loaf length capacity
- Dual control from right to left sides
- Special outfeed conveyor to split and turn loaves
- Refrigerated drums or water spray for raisin bread
- CE Approval and guards and coded magnetic door switches
- UL Approval
- CSA/UL Approval
- Available in metric construction (where possible)

## Technical Layout

