

**DOUBLE CHAMBER VACUUM PACKAGING MACHINE****ULTRAVAC® 2100**

**The Ultravac® 2100 is the market leading American made double chamber vacuum packaging machine.**

**INCREDIBLE DURABILITY  
FAST CYCLE TIMES  
RELIABLE PERFORMANCE**

- Increase shelf life
- Maximize product appearance
- Boost production
- Facilitate portioning



**HIGHLY CONFIGURABLE**

- 8 or 12" chamber depths.\*
  - Any electrical voltage, 3 phase for 7.5-hp or larger vacuum pumps and 1 phase 230v for 5-hp pump option.
  - 5\*, 7.5, 10, or 12-hp Busch pump.
  - Gas flush, wheels for mobility, 10 mm seal bar, and patented precut knife system optional.
- \*5-hp, 1 phase electrical option available with 8" depth only.

**MASSIVE PRODUCTION FOR THE MONEY**

Up to 15,000 4x6" packages per eight hour shift are possible!

**CONSISTENT, HIGH QUALITY OUTPUTS**

Produce consistent, trouble free, high quality retail packaging again and again. The special UltraSource Pozi Pressure™ radius surface sealing forces moisture and contaminants out of the seal area for optimal clean, leak resistant packaging.

**TWO YEAR WARRANTY**

Take comfort in warranty backed, proven, reliable performance and strength.



**UltraSource®**  
THE NEW STANDARD FOR INNOVATION

UltraSource LLC  
1414 West 29th Street | Kansas City, MO 64108-3604 USA

**800-777-5624**


Office: 816-753-2150  
Fax: 816-753-4976  
info@UltraSourceUSA.com  
UltraSourceUSA.com

# DOUBLE CHAMBER VACUUM PACKAGING MACHINE

## ULTRAVAC® 2100

### The Ultravac 2100 is the #1 American Made Vacuum Packaging Machine

because it is the most dependable, simple to own, simple to operate, double chamber vacuum packaging machine there is, whether you are preserving meat, poultry, cheese, fish, seafood, or produce.

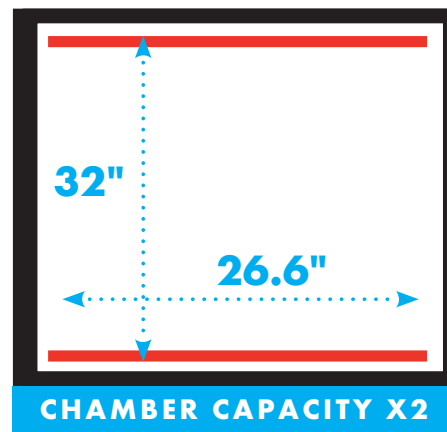

SPECIFICATIONS	8" DEPTH MODEL	12" DEPTH MODEL
Length	64.5-in. (1638.3mm)	64.5-in. (1638.3mm)
Width	42-in. (1066.8mm)	42-in. (1066.8mm)
Maximum Height	47-in. (1193.8mm)	51-in. (1295.4mm)
Working Height	34.4-in. (873.8mm)	34.4-in. (873.8mm)
Seal Bar Length	26.5-in. (673.1mm) X 4	26.5-in. (673.1mm) X 4
Chamber Width	30.9-in. (784.9mm)	30.9-in. (784.9mm)
Chamber Length	26.6-in. (675.6mm)	26.6-in. (675.6mm)
Chamber Depth	8-in. (203.2mm)	12-in. (304.8mm)
Distance Between Seal Bars	32-in. (812.8mm)	32-in. (812.8mm)
Vacuum Pump	5*, 7.5, 10 or 12-hp	7.5, 10 or 12-hp
Net Weight	1,100 to 1,400 lbs depending on options	1,100 to 1,400 lbs depending on options
Electrical Options (3-Phase Any voltage, 1-Phase 230)	208, 230*, 380, 460, 575V	208, 230, 380, 460, 575V
Control Panel	Standard: Digital	Standard: Digital
<b>ADD ONS:</b>		
Gas Flush, Modified Atmosphere Packaging	Optional	Optional
Patented Pre Cut Knife System	Optional	Optional
10mm Wide Band Seal	Optional	Optional
Mobile Caster Wheel Kit	Optional	Optional

\*1 phase electrical option available with 5-hp vacuum pump, 8" chamber depth, 230V only