


Switch for card 6 (2)A 250V~ with fast connection ivory Simon 24 Harmonie

REF. 2410526-031

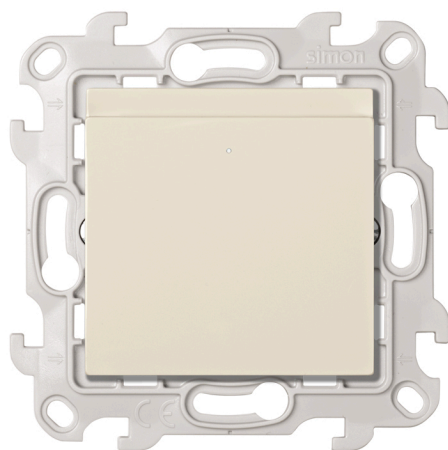

BASIC INFORMATION

FINISH

Ivory

PACKAGING CONTENTS

Mechanism

COMPATIBILITY

Simon 24 Harmonie frames

ETIM CLASS

EC001590

REMARKS

Recommended installation by linking the item to a relay. Otherwise, the switch's maximum current is 6A (inductive 2A).

TECHNICAL INFORMATION

AVAILABLE MARKET

CE, except for Spain, UK, Poland, Portugal, Andorra and Russia

CABLE SECTION ADMITTED (MM)

From 0,5 mm

CONSUMPTION INDICATOR (MA)

1 mA

NUMBER OF POSSIBLE ELEMENTS

1 element

IK CLASSIFICATION

01

CURRENT (A)

6(2 ind.) A

IP RATING

IP20

TYPE OF MECHANISM

Key | Card

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Flush-mounted or surface-mounted

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Faston

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053198070

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.13

PRODUCT NET WEIGHT

0.13

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053348604

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

77

PACKAGING WIDTH

39.5

PACKAGING LENGTH

77

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

234195.5

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.13

PACKAGING WEIGHT UNIT

KGM