


Touch switch/2-way relay switch (main) with blue light indicator up to 2000 W/VA

REF. 75322-69

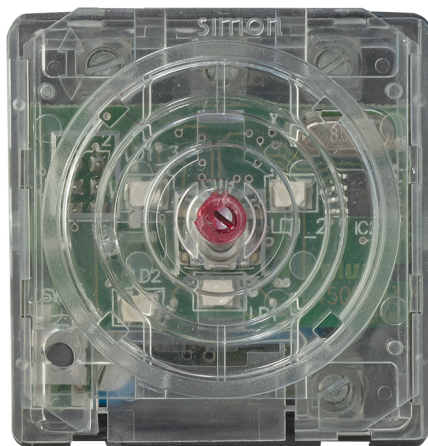

BASIC INFORMATION

DESCRIPTION

A switch must be characterized by its simplicity and functionality, without forgetting the appearance in its design, as well as we think it and apply it in the entire range of products of Simon. For example, switch - 2-way switch in this relay touch-switch included in the Simon 75 series, which has a blue indicator light up to 2000 W / VA. With a pulsation operation, the device also has a switch-off timer of between 0 and 15 minutes. But its advantages do not end here. This switch can be used on the surface-mounted or flush-mounted and is made of electronic components with halogen-free thermoplastic insulation. Thanks to Simon the control of the light will be in your hands. You will decide how much intensity and how long you want to apply each level, with what this means for saving and energy efficiency in your home or company. Available in boxes of one unit.

COMPATIBILITY

Simon 31, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

COMPATIBLE WITH 230V INCANDESCENT AND HALOGEN LAMPS (W)

2000 W

COMPATIBLE WITH MECHANICAL SWITCH

No

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

No

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

PACKAGING CONTENTS

Touch 2-way switch and instruction sheet

ETIM CLASS

EC000025

REMARKS

Two main touch mechanisms cannot be connected in the same circuit.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	NUMBER OF POSSIBLE ELEMENTS 1 element	MAXIMUM QUANTITY PER CIRCUIT 1
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	COMPATIBLE WITH FLUORESCENT LAMPS WITH 1- 10V DIMMABLE ELECTRONIC BALLAST No	TYPE OF MECHANISM Push
CONSUMPTION INDICATOR (mA) 1.5 mA		COMPATIBLE WITH MOTORS (VA) 8 A
NUMBER OF CONTACTS 4	COMPATIBLE WITH FLUORESCENT LAMPS (VA) 1200 VA Non-compensated	OPERATING TEMPERATURE RANGE (°C) 0 - 55 °C
NUMBER OF CONTROLLABLE CIRCUITS 1	FREQUENCY 50 Hz	POWER SUPPLY (V~) 230 V~
DISCONNECTION TIMER Between 0 and 15 minutes	INDICATOR FUNCTION Yes	RELAY OUTPUT CURRENT (A) 2000 VA
COMPATIBLE WITH HALOGENS WITH ELECTROMAGNETIC TRANSFORMER (W) 500 VA	IP RATING IP20	STORAGE TEMPERATURE RANGE (°C) 25 - 70 °C
COMPATIBLE WITH ELECTRONIC AUXILIARY No	COMPATIBLE WITH LOW CONSUMPTION (W) No	VERSION Single
COMPATIBLE WITH HALOGENS WITH ELECTRONIC TRANSFORMER (W) 500 VA	MAXIMUM POWER (W) 2000	NUMBER OF WIRES 3

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 6	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Included		

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053068311

PRODUCT NET WEIGHT

0.115

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

0.329

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053068311

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.115

UNITARY PACKAGING VOLUME

329232

PACKAGING HEIGHT

57

PACKAGING NET WEIGHT

0.115

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

76

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT

0.115

PACKAGING LENGTH

76