
Voice and data flat plate with dust cover for 1 element for 1 BeldenCDT® RJ45 connector black Simon K45

REF. **KA68/14**

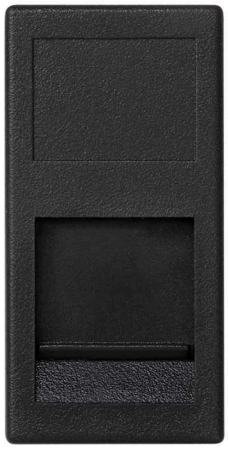

BASIC INFORMATION

DESCRIPTION

Between connectors and plates for voice and data connections of the series Simon K45 plate we find this voice and data board is fully. The product includes a dust shutter, it is an element for an RJ45 connector BeldenCDT. Its beautiful design commitment to a stylish and versatile finished in black grey colour. This plate is the individual version, with four elements in total. It is available for both one and two connectors in total. If you want to combine the plate in vertical enclosures, it is necessary to purchase the 90 ° positioner Simon reference (: K66), as it is essential to guide the plate into a vertical position. The dimensions are 45 x 45 millimetres, with a depth of 8.5 millimetres. It is manufactured in materials of the highest quality, which advocate by the thermoplastic components, halogen-free that enhance the security in its use. It can be installed in surface-mounted or flush mounted. And does not require any maintenance, since it is enough to clean it with a soft and dry cloth.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Flat voice and data plate with dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90º positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

COMPATIBLE WITH CONNECTORS
BeldenCDT® GigaFlex MDVO.

RJ45 CONNECTORS
Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

DUST PROTECTION
Yes

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

NUMBER OF MODULES
Four

PLATE TYPE
Flat

RAL
7021

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
BeldenCDT® RJ45 connectors

SNAP-FIT TYPE
BeldenCDT® RJ45 connectors

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.007

PRODUCT NET WEIGHT
0.007

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436045033

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
72

PACKAGING WIDTH
72

PACKAGING LENGTH
105

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
544320

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.145

PACKAGING NET WEIGHT
0.14

PACKAGING WEIGHT UNIT
KGM