


Group of 2 push buttons 10 A 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. 75393-39

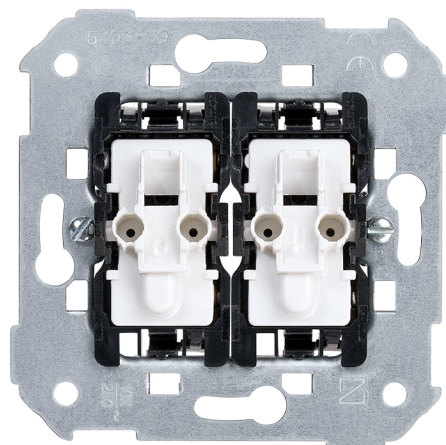

BASIC INFORMATION

DESCRIPTION

Group of 2 push buttons with built-in light indicator and quick terminal connection system. For 10A and 250V.

It belongs to the control mechanism category of the Simon 75 series and is suitable for both flush-mounted and surface installation.

Note that the cable section it accommodates is from 1.5 mm to 2.5 mm and the required cable stripping for successful connection is 15 mm.

The consumption of the light indicator is 1 mA. These mechanisms can also be mounted on the Simon 82 series.

The Simon 75 Collection offers numerous functions that provide comfort and safety, while also offering a wide range of options to conveniently equip each space. Different colors in the same frame create numerous possibilities to form the ideal set that best meets the various needs of each installation.

MATERIAL

Plastic, Metal

COMPATIBILITY

Marcos Simon 75, Simon 82
Detail, Simon 82 Nature, Simon
82 Concept and Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET CE	INDICATOR FUNCTION Yes	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	CURRENT (A) 10 A	RECESS DIMENSION (MM) 30
CONSUMPTION INDICATOR (mA) 1 mA	IP RATING IP20	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF CONTACTS 4	LINKABLE No	VERSION Double
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VOLTAGE (V~) 250 V~
FREQUENCY 50 Hz	MONOBLOCK No	NUMBER OF WIRES 4
	NOMINAL VOLTAGE (V~) 250 V~	

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE	UNITARY PACKAGING GROSS WEIGHT	PACKAGING LENGTH
8421053255988	0.073	223
UNITARY PACKAGING HEIGHT	PRODUCT NET WEIGHT	PACKAGING MEASUREMENT UNIT
0	0.073	MMT
UNITARY PACKAGING WIDTH	UNITARY PACKAGING WEIGHT UNIT	PACKAGING VOLUME
0	KGM	3026595
UNITARY PACKAGING LENGTH	PACKAGING EAN	PACKAGING VOLUME UNIT
0	8421053036617	MMQ
UNITARY PACKAGING MEASUREMENT UNIT	UNITS CONTAINED PACKAGING	PACKAGING GROSS WEIGHT
MMT	10	0.725
UNITARY PACKAGING VOLUME	PACKAGING HEIGHT	PACKAGING NET WEIGHT
3026595	82	0.73
UNITARY PACKAGING VOLUME UNIT	PACKAGING WIDTH	PACKAGING WEIGHT UNIT
MMQ	165	KGM

