


Flat voice and data plate with dust cover for 1 element with 2 RJ45 category 6 FTP white Simon 500 Cima

REF. 50003189-030

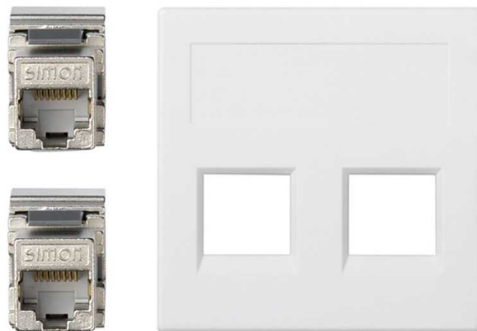

BASIC INFORMATION

DESCRIPTION

This is a flat base plate of voice and data for 1 element with 2 RJ45 category 6 FTP. The product is finished in white and is included in the Simon 500 Cima series. It measures 50x50x45,4 mm and is made of metal parts with halogen-free halogen-free thermoplastic material. Also, this material is self-extinguishing and guarantees the no-propagation of the flame of a fire. The plate is with clips for its correct installation in vertical and horizontal enclosures and does not require adapter. Does not include dust shutter. When it comes to maintenance, the manufacturer recommends cleaning this type of articles with a soft and dry cloth. The Simon 500 Cima series represents a clear commitment workplace solutions in work places. Its mechanisms allow installation much more agile thanks to the innovative click terminal connection system.

FINISH

White

PACKAGING CONTENTS

Flat voice and data plate without dust cover, 2 RJ45 category 6 FTP and installation manual

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST PROTECTION

No

PLATE TYPE

Flat

CABLE SECTION ADMITTED (MM)

22-26 AWG wiring

FORMAT

RJ45

RAL

9003

RJ45 CONNECTION

Without insertion tool

IP RATING

IP20

RJ45 ADAPTOR MODULE

Included in voice and data plate

CONNECTOR CHARACTERISTICS

category 6 FTP

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

NUMBER OF CONNECTORS

2

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

RJ45 CONNECTORS

Included in voice and data plate

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

VERSION

Single

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

NUMBER OF MODULES

1

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

57

UNITARY PACKAGING WIDTH

76

UNITARY PACKAGING LENGTH

76

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

329232

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.045

PRODUCT NET WEIGHT

0.045

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053098097

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

26

PACKAGING WIDTH

58

PACKAGING LENGTH

86

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

0.052

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.9

PACKAGING WEIGHT UNIT

KGM

