


Dual USB Charger A+C 30W Power Delivery gold Simon 270

REF. 20000296-095

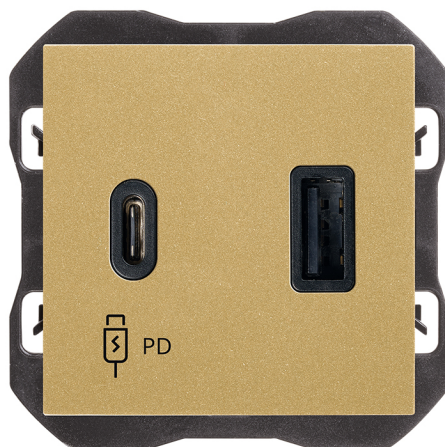

BASIC INFORMATION

FINISH

Matt gold

SYMBOL

PD

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 270 frames

PACKAGING CONTENTS

Mechanism, cover and
instruction sheet

ETIM CLASS

EC002949

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

No

POWER SUPPLY (V~)

230 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

RAL

1036

TYPE OF COVER

Large

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

USB CURRENT (A)

3,1 A

FORMAT

USB

TYPE OF MECHANISM

Insertion

USB PORT TYPE

A,C

FREQUENCY

50 - 60 Hz

MONOBLOCK

No

VOLTAGE (V~)

127/230 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

CLAW

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | EN 50563:2011 | EN 50563:2011 A1:2013 | EN 62368-1:2014 | EN 62368-1:2014 A11:2017 | EN IEC 63000:2018 | ETSI EN 301489-34 V1.4.1 | ETSI EN 301489-34 V2.1.1

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053277379

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.062

PRODUCT NET WEIGHT

0.062

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053277379

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

80

PACKAGING WIDTH

55

PACKAGING LENGTH

55

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

242000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.062

PACKAGING WEIGHT UNIT

KGM

