
Two-pole switch 16AX 250V~ with indicator light function and Faston/welding terminal connection system with plate black Simon K45

REF. **KL04/14**

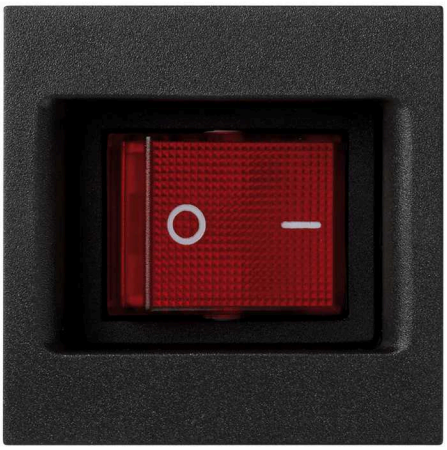

BASIC INFORMATION

DESCRIPTION

The series Simon K45 included in it all kinds of products designed to the interconnectivity in work environments or offices. This is why it needs specific switches, as this double-pole switch (the code of reference is the KL04 / 14) with indicator light function, so it includes an engraving of switching on - OFF. Finished in superb black, it has a Faston/welding terminal system. It is manufactured with the best and safest metal and halogen-free components. Also thermoplastic trim. Maximum durability and the maximum protection for years. Compatible with elements up to 16 Ampere current and 250 Volt voltage. With 1 element and 2 modules and with regard to your application in the wall, is suitable for surface or flush mounting, to clean, do so, simply use a soft, dry cloth. Finally, the user must be taken into account that the article includes the trim plate.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Mechanism with plate, black and blue cabling, faston and instructions

ETIM CLASS

EC001590

REMARKS

The article includes the trim plate.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
Up to 1,5 mm

CONSUMPTION INDICATOR (MA)
0.5 W/h

NUMBER OF POSSIBLE ELEMENTS
1 item

INDICATOR FUNCTION
Yes

CURRENT (A)
16 AX

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Tilting

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RAL
7021

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Faston - Solder

REGULATIONS

REGULATIONS
EN 60669-1:1999+A1:2002+A2:2008 + EN 50581:2012

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.037

PRODUCT NET WEIGHT
0.037

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436034518

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
88

PACKAGING WIDTH
123

PACKAGING LENGTH
136

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1472064

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.37

PACKAGING NET WEIGHT
0.37

PACKAGING WEIGHT UNIT
KGM